

TECHNICAL DOCUMENT

SWITCHIO PAY – ECR PROTOCOL

SUBMITTED BY	MONET+,a.s. Za Dvorem 505, Zlín - Štípa Czech Republic
UPDATED	2. 9. 2026
VERSION	6.24.1

The ownership of the document remains with MONET+,a.s. The present document may not be reproduced and/or disclosed, in whole or in part, to any third party without the previous written confidentiality agreement. The information contained in the present document may be used for the purpose specified in the document title.

CONTENT

CONTENT	2
1. DOCUMENT VERSION HISTORY	7
2. APPLICATION VERSION HISTORY	11
3. INTRODUCTION	13
3.1. INTENT	13
3.2. REQUEST	14
3.3. RESULT	15
3.3.1. Terminal busy result	15
3.3.2. Result structures and examples for each API version	15
Result structure v1	16
Result structure v2	18
Result structure v3	21
Result structure v4	23
Result structure v5	26
Result structure v6	28
Result structure v7	32
Result structure v8	36
Result structure v9	40
Result structure v10	44
4. CONTROL ENDPOINTS	48
4.1. CLOSING BATCH	48
4.1.1. Request	48
4.1.2. Result	50
4.2. DAUGHTER COMPANIES	51
4.2.1. Request	51
4.2.2. Result	51
4.3. SCANNER	52
4.3.1. Request	52
4.3.2. Result	52
4.4. UPDATE TERMINAL CONFIGURATION	53
4.4.1. Request	53
4.4.2. Result	54
4.5. TOUCH - AUTOMATIC CONFIGURATION UPDATE	55
4.5.1. Broadcast	55
4.5.2. Request	56
4.5.3. Result	56
4.6. SUBTOTAL	57
4.6.1. Request	57
4.6.2. Result	57
4.7. HANDSHAKE	58
4.7.1. Request	58

4.7.2. Result	58
4.8. TOKEN	59
4.8.1. Request	59
4.8.2. Result	60
4.9. GET LAST TRANSACTION	60
4.9.1. Request	60
4.9.2. Result	61
4.10. GET ALL SUCCESSFUL TRANSACTIONS	62
4.10.1. Request	62
4.10.2. Result	63
4.11. GET OFFLINE PAYMENTS STATUS	64
4.11.1. Request	64
4.11.2. Result	64
4.12. CARD VERIFY	65
4.12.1. Request	65
4.12.2. Result	65
4.13. SETTINGS	68
4.13.1. Request	68
4.13.2. Result	68
4.14. OPEN PREAUTHORIZATIONS	69
4.14.1. Request	69
4.14.2. Result	69
4.15. INITIALIZE TERMINAL	71
4.15.1. Request	71
4.15.2. Result	71
4.16. SUBMIT OFFLINE PAYMENTS	73
4.16.1. Request	73
4.16.2. Result	73
4.17. CANCEL TRANSACTION	74
4.17.1. Request	74
4.17.2. Result	74
4.18. TRANSACTION STATE	76
4.18.1. Result	76
5. RETAIL ENDPOINTS	77
5.1. PAYMENT	77
5.1.1. Request	77
5.1.2. Result	78
5.2. REFUND	79
5.2.1. Request	79
5.2.2. Result	80
5.3. PREAUTHORIZATION	80
5.3.1. Request	80
5.3.2. Result	81
5.4. INCREMENT PREAUTHORIZATION	81
5.4.1. Request	81
5.4.2. Result	83

5.5. DECREMENT PREAUTHORIZATION	83
5.5.1. Request	83
5.5.2. Result	84
5.6. COMPLETE PREAUTHORIZATION	85
5.6.1. Request	85
5.6.2. Result	86
5.7. CANCEL PREAUTHORIZATION	86
5.7.1. Request	86
5.7.2. Result	87
5.8. PREAUTHORIZATION – EXTERNAL COMPLETE	87
5.8.1. Request	87
5.8.2. Result	89
5.9. PREAUTHORIZATION – EXTERNAL INCREMENT	90
5.9.1. Request	90
5.9.2. Result	91
5.10. PREAUTHORIZATION – EXTERNAL DECREMENT	92
5.10.1. Request	92
5.10.2. Result	93
5.11. PREAUTHORIZATION – EXTERNAL CANCEL	94
5.11.1. Request	94
5.11.2. Result	95
5.12. GET TRANSACTION	95
5.12.1. Request	95
5.12.2. Result	96
5.13. REVERSAL	97
5.13.1. Request	97
5.13.2. Result	98
5.14. MOTO	98
5.14.1. Request	98
5.14.2. Result	99
5.15. MOTO PREAUTHORIZATION	100
5.15.1. Request	100
5.15.2. Result	101
5.16. TRANSACTION STATUS	102
5.16.1. Request	102
5.16.2. Result	102
5.17. REFERRAL REFUND	103
5.17.1. Request	103
5.17.2. Result	104
5.18. CASHBACK	104
5.18.1. Request	104
5.18.2. Result	105
5.19. QR PAYMENT	106
5.19.1. Request	106
5.19.2. Result	107
5.20. READ CARD	108

5.21. Request	108
5.22. Result	109
5.23. READ CARD PAYMENT	110
5.24. Request	110
5.25. Result	112
6. TRANSPORT ENDPOINTS	113
6.1. TRANSPORT INIT	113
6.1.1. Request	113
6.1.2. Result	113
6.2. TRANSPORT PAYMENT	114
6.2.1. Request	114
6.2.2. Result	116
6.3. TRANSPORT REFUND	118
6.3.1. Request	118
6.3.2. Result	119
6.4. TRANSPORT REVERSAL	122
6.4.1. Request	122
6.4.2. Result	122
6.5. CUSTOMER TAP	123
6.5.1. Request	123
6.5.2. Result	124
6.6. UPLOAD TRANSPORT TRANSACTIONS	125
6.6.1. Request	125
6.6.2. Result	125
6.7. CUSTOMER TAP SERVICE START	126
6.7.1. Request	126
6.7.2. Result	126
6.8. CUSTOMER TAP SERVICE STOP	128
6.8.1. Request	128
6.8.2. Result	128
6.9. GET TAPS	129
6.9.1. Request	129
6.9.2. Result	129
6.10. GET DENYLIST UPDATE	130
6.10.1. Request	130
6.10.2. Result	130
7. APPLICATION DESCRIPTION	131
7.1. Payment	131
7.2. Refund	132
7.3. Dashboard	132
7.4. The closing batch	133
7.5. Settings	134
7.6. Service Settings	135
7.6.1. Key injection	137
ATTACHMENT - ENUMS	139
TerminalErrorCodes	139



PinCommunicationsKey	1
EmvResponseData	1
EmvAdditionalResponseData	1
CvmType	1
CardInputType	1
TransactionType parameter	1
Transaction state	1
BatchTotals parameter	1

1. DOCUMENT VERSION HISTORY

VERSION	DATE	AUTHOR	DESCRIPTION
1.0	29.10.2019	RTA	1st version of the document
2.0	13.01.2020	GBI	Documentation revision
3.0	07.01.2022	PZI	Request check: MOTO Payment, Last Transaction, Get Successful Transactions + added Reversal by ID
4.0	05.04.2022	PZI	ECR V3 since SwitchioPay 3.1.0
4.1	20.04.2022	GBI	Revision of the new chapter of ECR v3
4.2	11.07.2022	GBI AAD	- Added tables with field descriptions for individual operations - Added examples of individual calls in JSON
4.3	05.09.2022	XRTA AAD	added sections to ECR v3 - PreAuth External Complete - PreAuth External Cancel - PreAuth Increment - PreAuth Transaction - Closing batch - Daughter Companies - Scanner - new Transaction Type parameters deleted sections - Transport Reversal - Transport Refund
5.0	14.12.2022	M+(AAD)	Added ECR v4.
5.01	01.02.2023	M+(AAD)	Added two result lines to Card Verify ECR v4
5.02	01.03.2023	M+(AAD)	Added cardUid to Token – ECR v4
5.03	30.04.2023	M+(AAD) XRTA	Updated Result-V4 Added Configuration Update V4 result example
5.04	16.05.2023	XRTA	Fixed CardVerify v4 response
5.05	22.05.2023	M+(AAD)	Added OPEN PREAUTHORIZATION result example
5.06	07.06.2023	XPZI	Changed daughter_companies from main to light API
5.07	24.07.2023	M+(AAD)	Added ECR v5 – Result monet Token

			par
5.08	19.9.2023	M+(AAD)	Added Get taps v5 , Get Denylist last update
5.09	23.11.2023	M+(KLA)	Restructured documentation and new information added: - Sections are now organized according to the endpoints (not API versions); - Added new endpoints: cashback, customer tap service start and customer tap service stop; - Completed information about all endpoints with examples and URIs for different versions.
5.10	23.2.2024	M+(KLA)	Updated the tms_update endpoint information: - v5 URI updated - added v5 request example - added info for Uri.Builder() - v5
6.00	10. 10. 2024	M+(KLA)	Added new endpoints: DECREMENT PREAUTHORIZATION QR PAYMENT Added new endpoint versions for v6. Added new Transaction result for v6 - Result structure v6 . Minor changes and corrections
6.10	5. 11. 2024	M+(KLA)	Updated: Transport payment request with new optional fields - Added new TerminalErrorCode
6.11	15. 1. 2025	M+(OMR)	Added new endpoint: INITIALIZE TERMINAL Added new endpoint versions for v6.
6.12	21. 2. 2025	M+(GBI)	Extensions released with ECR v7 Support for new operations for Transport mode: - PAYMENT Operation Extension for Virtualization - Adding REVERSAL operation for TRANSPORT ENDPOINT - Adding REFUND operation for TRANSPORT ENDPOINT - Added new endpoints for v7
6.13	25. 2. 2025	M+(OMR)	Support for new operations for Retail mode: - Adding READ CARD operation for RETAIL ENDPOINTS - Adding READ CARD PAYMENT operation for RETAIL ENDPOINT
6.14.0	1. 5. 2025	M+(PZI)	API changes:

			- Added new TerminalErrorCodes which are breaking changes - READING_CARD_FAILED (8008) - SECOND_TAP_CARD_MISMATCH (8009) - Adjusted transport payment request by adding additional fields and support of virtualisation: TRANSPORT PAYMENT Added new endpoints for: TRANSPORT REFUND TRANSPORT REVERSAL
6.15.0	2. 6. 2025	M+ (FMI)	Added new endpoints for: MOTO PREAUTHORIZATION EXTERNAL PREAUTH INCREMENT EXTERNAL PREAUTH DECREMENT
6.16.0	4. 7. 2025	M+ (PMR)	Updated the TerminalErrorCodes table with new error mappings.
6.17.0	17. 7. 2025	M+ (PZI)	Added new transportData field for Transport refund request for version 4.7.1 SwitchioPay
6.18.0	31. 7. 2025	M+ (PMR)	Updated the TerminalErrorCodes table with new error mappings.
6.19.0	24. 9. 2025	M+ (FMI)	Added new endpoint versions for v8. Added new Transaction result for v8 – Result structure v8. Added new Transaction results fields: additionalFeeAmount, transferId and fields for future releases offlineIdentification, systemTraceAuditNumber and gatewayUniqueTransactionId
6.20.0	23. 3. 2026	M+ (JRO)	Added new endpoint versions for v9. Added new Transaction results fields: gatewayUniqueTransactionId Added printing policy fields to financial requests.
6.21.0	19. 5. 2026	M+ (JRO)	Added new endpoint version for V10. Added new Transaction results fields: workOrderId unencryptedId closeLoopData
6.22.0	1. 6. 2026	M+ (MHN)	Added new V10 endpoints for: GET OFFLINE PAYMENTS STATUS SUBMIT OFFLINE PAYMENTS
6.23.0	10. 6. 2026	M+ (MHN)	Extended V10 endpoint. Added new Transaction result field: gastroConto

6.24.0	7. 8. 2026	M+ (MHN)	Added new endpoints for: CANCEL_TRANSACTION TRANSACTION_STATE
--------	------------	----------	---

2. APPLICATION VERSION HISTORY

ENDPOINT VERSION	APPLICATION VERSION	DESCRIPTION OF CHANGES
v1	1.0.0	First release
v2	1.8.0	New endpoints: • Touch TMS Update • Subtotal • Get last transaction • Get all successful transactions • PreAuth cancel • Reversal by ID • Moto payment • Transaction status
v3	3.0.0	New endpoints: • PreAuth transactions • Daughter companies • Scanner • PreAuth increment • PreAuth external complete • PreAuth external cancel • Referral refund New field tokens New format of date for serialization
v4	3.4.0	New endpoints: • Intent • Result • Card verify New format of API calls
v5	4.1.0	New endpoints: • Get taps • Get denylist last update • Customer tap service start • Customer tap service stop • Cashback • QR payment (from v 4.4.0) • Decrement preauthorization (from v 4.4.0) New fields in transaction Result response: • par • monetToken
v6	4.5.0	New version of TransactionResult with new fields: • dccOffer • dccResult • surcharge • externalTransactionId New fields in the Transport payment request • transportAmount • transportCurrencyCode

		New control endpoint INITIALIZE TERMINAL
v7	4.7.0	New version of TransactionResult with new fields: - licensePlate - cid - appCryptogram - authorizationResponseCode Support for new operations for Transport mode: - PAYMENT Operation Extension for Virtualization - Adding REVERSAL operation for TRANSPORT ENDPOINT - Adding REFUND operation for TRANSPORT ENDPOINT Support for new operations for Retail mode: - Adding READ CARD operation for RETAIL ENDPOINTS - Adding READ CARD PAYMENT operation for RETAIL ENDPOINTS - Adding MOTO PREAUTHORIZATION operation for RETAIL ENDPOINTS - Adding EXTERNAL PREAUTH INCREMENT operation for RETAIL ENDPOINTS - Adding EXTERNAL PREAUTH DECREMENT operation for RETAIL ENDPOINTS
v8	4.8.0	New version of TransactionResult with new fields: - additionalFeeAmount - transferId - systemTraceAuditNumber - RFU - offlineIdentification - RFU - gatewayUniqueTransactionId - RFU
v9	5.0.0	New version of TransactionResult with new fields: - gatewayUniqueTransactionId New fields in Financial Requests: - merchantReceiptPolicy - customerReceiptPolicy When the new request into an ongoing transaction is sent, the app returns busy to the request.
v10	5.1.0	New version of TransactionResult with new field: - workOrderId - unencryptedId - closeLoopData - gastroConto

3. INTRODUCTION

The terminal application implements an interface through which the application can be used by third-party cashier applications on the same device.

In principle, this is an intent with specific parameters that are described in each category of this documentation.

ECR has following versions:

- ECR v1 – An outdated version of the ECR API interface.
- ECR v2 – New cash register implementations should have this version of the API.
- ECR v3 – Is to be used for the new cash registers, it introduces new field tokens and provides a better format of date for serialization.
- ECR v4 – To be used for the new cash registers. ECR V4 defines the new format of API calls, as well as new operations such as CardVerify.
- ECR v5 – Defines new transaction result with fields par and monetToken. Defines new endpoints qr_payment and preauth_decrement.
- ECR v6 – Defines new transaction result with optional fields dccOffer, dccResult, externalTransactionId and surcharge.
- ECR v7 – Defines new operations for transport mode (reversal and refund) and extensions to support virtualization. Defines new operations for retail mode read card and read card payment.
- ECR v8 – Defines new transaction result with optional fields additionalFeeAmount, transferId
- ECR v9 – Defines new transaction result with optional field gatewayUniqueTransactionId. Additionally, customers can turn off or on the receipt output by using new request parameters for financial requests.
- ECR v10 – Defines new transaction result with optional fleet card data fields: workOrderId and unencryptedId. And closeLoopData for Close Loop cards.

The application opens via Intent, which must have the following format described in the next chapter.

3.1. INTENT

To perform a selected operation, it is required to create an Intent with specific data.

To version ECR V4

Action:

```
act=android.intent.action.SENDTO
```

From version ECR V4

Action:

```
act=switchio.pay.ECR
```

URI:

See selected operation URI example.

To version ECR V4

Intent call example:

```
val intent = Intent ("android.intent.action.SENDTO", uri)
startActivityForResult(intent = intent, requestCode = 123)
```

From version ECR V4

Intent call example:

```
val intent = Intent ("switchio.pay.ECR", uri)
startActivityForResult(intent = intent, requestCode = 123)
```

It's recommended to use flag `Intent.FLAG_ACTIVITY_REORDER_TO_FRONT` in intent to prevent multiple simultaneous instances of the app.

3.2. REQUEST

To version ECR V4

```
Call
val data = Json.stringify(
    PaymentRequest.serializer(),
    PaymentRequest("1234", 1234, 203, "vs")
)

val intent = Intent ("android.intent.action.SENDTO",
Uri.parse("paya://payment?data=$data"))
startActivityForResult(intent, TERMINAL_REQUEST_CODE)

Input data structure
@Serializable
data class PaymentRequest(
    @SerializedName("TransactionID")
    val transactionId: String,
    @SerializedName("Amount")
    val amount: Int,
    @SerializedName("CurrencyCode")
    val currencyCode: Int,
    @SerializedName("InvoiceNumber")
    val invoiceNumber: String = ""
)
```

From version ECR V4

```
Call
val data = Json.stringify(
    PaymentRequest.serializer(),
    PaymentRequest("1234", 1234, 203, "vs")
)

val uri = Uri.Builder().apply {
    scheme("app")
    authority("switchiopay")
    path("api/main/v4/payment")
    appendQueryParameter("data", data)
}.build()
val intent = Intent ("switchio.pay.ECR", uri)
startActivityForResult(intent, TERMINAL_REQUEST_CODE)

Input data structure
@Serializable
data class PaymentRequest(
    @SerializedName("TransactionID")
    val transactionId: String,
```

```
@SerializedName("Amount")
val amount: Int,
@SerializedName("CurrencyCode")
val currencyCode: Int,
@SerializedName("InvoiceNumber")
val invoiceNumber: String = ""
)
```

3.3. RESULT

The operation result is returned as a **JSON** in a **Bundle** in the **Intent** data.

Possible bundle result codes:

Code	Description
-1	Success
0	Failure
1	Init Failure
2	Terminal Busy

Possible bundle result keys:

transaction_result
data

Bundle result value type:

String

3.3.1. Terminal busy result

If a new operation is initiated before the previous one completes, the application returns a **Terminal Busy** result.

Result example:

```
{
  "transactionId": "",
  "transactionType": null,
  "reversal": false,
  "dateTimeTerminal": null,
  "responseCode": "UNDEFINED",
  "responseMessage": "Terminal busy"
}
```

3.3.2. Result structures and examples for each API version

Following result structures are valid for most of the requests (all payment endpoints and some control endpoints):

- [Update Terminal Configuration](#)

- [Touch - Automatic Terminal Configuration Update](#)
- [Get Last Transaction](#)
- [Get All Successful Transactions](#)
- [Open Preauthorizations](#)
- [Payment](#)
- [Refund](#)
- [Preauthorization](#)
- [Increment Preauthorization](#)
- [Decrement Preauthorization](#)
- [Complete Preauthorization](#)
- [Cancel Preauthorization](#)
- [Preauthorization External Complete](#)
- [Preauthorization External Cancel](#)
- [Get transaction](#)
- [Reversal](#)
- [MOTO](#)
- [Transaction Status](#)
- [Referral Refund](#)
- [Cashback](#)
- [QR payment](#)

Result structure v1

ENTITY	TYPE	DESCRIPTION
transactionType	string	Transaction types; enums in table TransactionType parameter
responseCode	TerminalError Codes	Code of the response, see TerminalErrorCodes
responseMessage	string	Message of the response
sequenceNumber	string	Number of the sequence
authCode	string	Code of the authorization
reversal	boolean	Information if the transaction is a reversal or not
amount	int	Amount of the transaction in cents. 500 is 5.00 euro
invoiceNumber	string	Variable symbol, max length is 20 char
currency	int	Code of the currency
dateTimeTerminal	date	Date and time on terminal, when was the result made
dateTimeServer	date	Date and time on server when, was the result made
aid	string	Application identifier
pan	string	Primary account number
panSequenceNumber	string	Sequence number of the primary account number
expiration	string	Expiration date of the card

conto	string	Card issuer
applLabel	string	Label of application
pinCommunicationsKey	PinCommunicationsKey	Type communication key PIN, enums PinCommunicationsKey
emvResponseData	EmvResponseData	Object of the response EmvResponseData
emvAdditionalResponseData	EmvAdditionalResponseData	Object of the response EmvAdditionalResponseData
aosa	int	Available offline sending amount
ErrorFlag	char	Error flag
emvData	EmvTlv	EMV data
cvmTypeList	List< CvmType >	Type of the TRX. Enum is in CvmType
batchTotals	batchTotals	Object of the BatchTotals parameter

Result example v1:

```
{
  "aid": "A0000000283101",
  "amount": 500,
  "aosa": "null",
  "applLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "callReversal": false,
  "cardInputType": "CLESS",
  "conto": "MASTERCARD",
  "currency": 203,
  "cvmTypeList": ["PIN_ONLINE"],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "emvResponseData": {
    "smartCardScheme": "1",
    "authorisationResponseCode": "00"
  },
  "expiration": "****",
  "invoiceNumber": "VS",
  "isReversed": false,
  "merchantIdAcquirer": "TNEXGO01",
  "merchantIdIssuer": "1357",
  "pan": "970348*****3910",
  "panSequenceNumber": "00",
  "responseCode": "OK",
  "responseMessage": "potvrzeno",
  "reversal": false,
  "sequenceNumber": "001001614",
  "terminalIdAcquirer": "M1TNEXGO01",
  "terminalIdIssuer": "M1TNEXGO01",
  "transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
  "transactionType": "SALE_ONLINE",
  "token": ["fkdfkjbejrhjlb"] //default - empty list
}
```

Result structure v2

ENTITY	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
transactionType	TransactionType	Transaction types; enums in table TransactionType parameter
aid	string	OPTIONAL Application identifier
amount	int	OPTIONAL Amount of the transaction in cents. 500 is 5.00 euro
applabel	string	OPTIONAL Label of application
authCode	string	Code of the authorization
callReversal	boolean	Information on whether a reversal was generated for this transaction
reversal	boolean	Information if the transaction is a reversal or not
conto	string	OPTIONAL Card issuer
currency	int	OPTIONAL Code of the currency
dateTimeTerminal	string	Date and time on terminal, when was the result made
dateTimeServer	string	OPTIONAL Date and time on server when, was the result made
emvResponseData	EmvResponseData	OPTIONAL Object of the response EmvResponseData
expiration	string	OPTIONAL Expiration date of the card
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
responseCode	TerminalErrorCodes	Code of the response, see TerminalErrorCodes
responseMessage	string	Message of the response
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer

pan	string	OPTIONAL Primary account number
token	string	OPTIONAL Encrypted combination of data
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number
aosa	int	OPTIONAL Available offline sending amount
cardHolderMessage	string	OPTIONAL Message from the server for the cardholder
merchantMessage	string	OPTIONAL Message from the server for the merchant
availableBalance	string	OPTIONAL Balance of the available funds
sequenceNumber	string	Number of the sequence
cvmTypeList	List< CvmType >	Type of the TRX. Enum is in CvmType
cardInputType	CardInputType	OPTIONAL Type of the input. Enum is in the CardInputType
isReversed	boolean	Information whether the transaction was reversed

Result example v2:

```
{
  "aid": "A00000000283101",
  "amount": 500,
  "aosa": "null",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "callReversal": false,
  "cardInputType": "CLESS",
  "conto": "MASTERCARD",
  "currency": 203,
  "cvmTypeList": ["PIN_ONLINE"],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "emvResponseData": {
    "smartCardScheme": "1",
    "authorisationResponseCode": "00"
  },
  "expiration": "****",
  "invoiceNumber": "VS",
  "isReversed": false,
  "merchantIdAcquirer": "TNEXGO01",
  "merchantIdIssuer": "1357",
  "pan": "970348*****3910",
  "panSequenceNumber": "00",
  "responseCode": "OK",
  "responseMessage": "potvrzeno",
  "reversal": false,
  "sequenceNumber": "001001614",
}
```

```
"terminalIdAcquirer": "M1TNEXGO01",  
"terminalIdIssuer": "M1TNEXGO01",  
"transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",  
"transactionType": "SALE_ONLINE",  
"token": ["fkdfkjbekjrhljb" ] //default - empty list  
}
```

Result structure v3

ENTITY	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier
amount	int	OPTIONAL Amount of the transaction in cents. 500 is 5.00 euro
aosa	int	OPTIONAL Available offline sending amount
applabel	string	OPTIONAL Label of application
authCode	string	OPTIONAL Code of the authorization
availableBalance	string	OPTIONAL Balance of the available funds
cardHolderMessage	string	OPTIONAL Message from the server for the cardholder
cardInputType	CardInputType	OPTIONAL Type of the input. Enum is in the CardInputType
conto	string	OPTIONAL Card issuer
currency	int	OPTIONAL Code of the currency
cvmTypeList	List< CvmType >	OPTIONAL Type of the TRX. Enum is in CvmType
dateTimeServer	string	OPTIONAL Date and time on server when, was the result made
dateTimeTerminal	string	OPTIONAL Date and time on terminal, when was the result made
emvResponseData	EmvResponseData	OPTIONAL Object of the response EmvResponseData
expiration	string	OPTIONAL Expiration date of the card
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
isReversed	boolean	OPTIONAL Information whether the transaction was reversed
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer

merchantMessage	string	OPTIONAL Message from the server for the merchant
pan	string	OPTIONAL Primary account number
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number
refundId	long	OPTIONAL Refund ID (added since SwitchioPay 3.1.2)
responseCode	TerminalErrorCodes	OPTIONAL Code of the response, see TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response
reversal	boolean	OPTIONAL Information if the transaction is a reversal or not
sequenceNumber	string	OPTIONAL Number of the sequence
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal
token	string	Encrypted combination of data
transactionId	string	ID of the transaction.
transactionType	string	Transaction types; enums in table TransactionType parameter

Result example v3:

```
{
  "aid": "A00000000283101",
  "amount": 500,
  "aosa": "null",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "callReversal": false,
  "cardInputType": "CLESS",
  "conto": "MASTERCARD",
  "currency": 203,
  "cvmTypeList": ["PIN_ONLINE"],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "emvResponseData": {
    "smartCardScheme": "1",
    "authorisationResponseCode": "00"
  },
  "expiration": "****",
  "invoiceNumber": "VS",
  "isReversed": false,
  "merchantIdAcquirer": "TNEXGO01",
  "merchantIdIssuer": "1357",
}
```

```

"pan": "970348*****3910",
"panSequenceNumber": "00",
"responseCode": "OK",
"responseMessage": "potvrzeno",
"reversal": false,
"sequenceNumber": "001001614",
"terminalIdAcquirer": "M1TNEXGO01",
"terminalIdIssuer": "M1TNEXGO01",
"transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
"transactionType": "SALE_ONLINE",
"token": ["fkdfkjbejrhjlb"] //default - empty list
}

```

Result structure v4

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
amount	int	OPTIONAL Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
aosa	int	OPTIONAL Available offline sending amount.
applabel	string	OPTIONAL Label of application.
authCode	string	OPTIONAL Code of the authorization.
availableBalance	string	OPTIONAL Balance of the available funds.
brand	string	OPTIONAL
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType
cardHolderMessage	string	OPTIONAL Card issuer.
currency	int	OPTIONAL ISO 4217 currency code.
cvmTypeList	string array	OPTIONAL Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the

		result was made.
emvResponseData	object	OPTIONAL Object of the response. EmvResponseData
smartCardScheme	string	OPTIONAL Scheme of the smart card.
authorisationResponseCode	string	OPTIONAL The response code of authorization.
expiration	string	OPTIONAL Expiration date of the card.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
isReversed	boolean	OPTIONAL Information whether the transaction was reversed.
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
merchantMessage	string	OPTIONAL Message for the merchant
pan	string	OPTIONAL Primary account number.
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
refundId	string	OPTIONAL ID of the refund transaction
responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response.
reversal	boolean	OPTIONAL Information if the transaction is a reversal or not.
sequenceNumber	string	OPTIONAL Number of the sequence.
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
tipAmount	integer	OPTIONAL Amount of the tip
transactionId	string	ID of the transaction.

transactionType	string	Transaction type. TransactionTypes
tokens	string array	OPTIONAL Encrypted combination of data.

Result example v4:

```
{
  "aid": "A00000000283101",
  "amount": 500,
  "aosa": "null",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "brand": "MASTERCARD",
  "cardHolderMessage": "Approved",
  "cardInputType": "CLESS",
  "currency": 203,
  "cvmTypeList": ["PIN_ONLINE"],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "emvResponseData": {
    "smartCardScheme": "1",
    "authorisationResponseCode": "00"
  },
  "expiration": "****",
  "invoiceNumber": "VS",
  "isReversed": false,
  "merchantIdAcquirer": "TNEXGO01",
  "merchantIdIssuer": "1357",
  "merchantMessage": "Approved",
  "pan": "970348*****3910",
  "panSequenceNumber": "00",
  "refundId": "1234567890",
  "responseCode": "OK",
  "responseMessage": "potvrzeno",
  "reversal": false,
  "sequenceNumber": "001001614",
  "tipAmount": 100,
  "terminalIdAcquirer": "M1TNEXGO01",
  "terminalIdIssuer": "M1TNEXGO01",
  "transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
  "transactionType": "SALE_ONLINE",
  "tokens": ["fkdfkjbejrhljb"] //default - empty list
}
```

Obtain result example:

```
override fun onActivityResult(requestCode: Int, resultCode: Int, data: Intent?) {
    super.onActivityResult(requestCode, resultCode, data)
    if (requestCode == 123) {
        val response = data?.extras?.getString("transaction_result")
        ...
    }
}
```

Result structure v5

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
amount	int	OPTIONAL Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
aosa	int	OPTIONAL Available offline sending amount.
applabel	string	OPTIONAL Label of application.
authCode	string	OPTIONAL Code of the authorization.
availableBalance	string	OPTIONAL Balance of the available funds.
brand	string	OPTIONAL
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType
cardToken	string	OPTIONAL
cardHolderMessage	string	OPTIONAL Card issuer.
currency	int	OPTIONAL ISO 4217 currency code.
cvmTypeList	string array	OPTIONAL Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the result was made.
emvResponseData	object	OPTIONAL Object of the response. EmvResponseData
smartCardScheme	string	OPTIONAL Scheme of the smart card.
authorisationResponseCode	string	OPTIONAL The response code of authorization.
expiration	string	OPTIONAL Expiration date of the card.

invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
isReversed	boolean	OPTIONAL Information whether the transaction was reversed.
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
merchantMessage	string	OPTIONAL Message for the merchant
monetToken	string	OPTIONAL
pan	string	OPTIONAL Primary account number.
par	string	OPTIONAL
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
refundId	string	OPTIONAL ID of the refund transaction
responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response.
reversal	boolean	OPTIONAL Information if the transaction is a reversal or not.
sequenceNumber	string	OPTIONAL Number of the sequence.
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
tipAmount	integer	OPTIONAL Amount of the tip
transactionId	string	ID of the transaction.
transactionType	string	Transaction type. TransactionTypes
tokens	string array	OPTIONAL Encrypted combination of data.

Result structure v6

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
amount	int	OPTIONAL Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point). It is the total amount that includes the surcharge amount as well as the tip amount (if applied on the transaction).
aosa	int	OPTIONAL Available offline sending amount.
applLabel	string	OPTIONAL Label of application.
authCode	string	OPTIONAL Code of the authorization.
availableBalance	string	OPTIONAL Balance of the available funds.
brand	string	OPTIONAL
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType
cardToken	string	OPTIONAL
cardHolderMessage	string	OPTIONAL Card issuer.
currency	int	OPTIONAL ISO 4217 currency code.
cvmTypeList	string array	OPTIONAL Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the result was made.
dccOffer	object	OPTIONAL dccOffer object
type	string	Card type. Possible values: • VISA • MASTERCARD • UNKNOWN

currency	string	Name of the DCC currency
amountExponent	int	Amount exponent. Indicates how many decimal places the amount is calculated.
convertedAmount	long	Converted amount
rateExponent	int	DCC rate exponent. Indicates how many decimal places the currency is calculated.
rate	long	Conversion rate
language	string	Language code
ecbRateExponent	int	European Central Bank rate exponent. Indicates how many decimal places the currency is calculated.
ecbRate	long	European Central Bank rate.
markup	int	Markup amount
currencyCode	int	Code of the DCC currency
dccResult	string	OPTIONAL DCC result. Possible values: - PERFORMED - NOT_PERFORMED
emvResponseData	object	OPTIONAL Object of the response. EmvResponseData
smartCardScheme	string	OPTIONAL Scheme of the smart card.
authorisationResponseCode	string	OPTIONAL The response code of authorization.
expiration	string	OPTIONAL Expiration date of the card.
externalTransactionId	string	OPTIONAL Transaction ID in an external system.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
isReversed	boolean	OPTIONAL Information whether the transaction was reversed.
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
merchantMessage	string	OPTIONAL Message for the merchant
monetToken	string	OPTIONAL

pan	string	OPTIONAL Primary account number.
par	string	OPTIONAL
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
refundId	string	OPTIONAL ID of the refund transaction
responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response.
reversal	boolean	OPTIONAL Information if the transaction is a reversal or not.
sequenceNumber	string	OPTIONAL Number of the sequence.
surcharge	int	OPTIONAL Surcharged amount
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
tipAmount	integer	OPTIONAL Amount of the tip
transactionId	string	ID of the transaction.
transactionType	string	Transaction type. TransactionTypes
tokens	string array	OPTIONAL Encrypted combination of data.

Result example v6:

```
{
  "aid": "A00000000283101",
  "amount": 500,
  "aosa": "null",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "brand": "MASTERCARD",
  "cardHolderMessage": "Approved",
  "cardInputType": "CLESS",
  "currency": 203,
  "cvmTypeList": [
    "PIN_ONLINE"
  ],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "dccOffer": {
```

```
{
  "type": "VISA",
  "currency": "USD",
  "amountExponent": 2,
  "convertedAmount": 11556691,
  "rateExponent": 6,
  "rate": 1155680,
  "language": "us",
  "ecbRateExponent": 0,
  "ecbRate": 0,
  "markup": 375,
  "currencyCode": 840
},
"dccResult": "PERFORMED",
"emvResponseData": {
  "smartCardScheme": "1",
  "authorisationResponseCode": "00"
},
"expiration": "****",
"externalTransactionId": "5043365e4faa-48a3ea7d-1357",
"invoiceNumber": "VS",
"isReversed": false,
"merchantIdAcquirer": "TNEXGO01",
"merchantIdIssuer": "1357",
"merchantMessage": "Approved",
"monetToken": "MONETTOKEN",
"pan": "970348*****3910",
"par": "PAR",
"panSequenceNumber": "00",
"refundId": "1234567890",
"responseCode": "OK",
"responseMessage": "potvrzeno",
"reversal": false,
"sequenceNumber": "001001614",
"surcharge": 120,
"tipAmount": 100,
"terminalIdAcquirer": "M1TNEXGO01",
"terminalIdIssuer": "M1TNEXGO01",
"tokens": ["fkdfkjbejrhbjb"],
"transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
"transactionType": "SALE_ONLINE"
}
```

Result structure v7

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
amount	int	OPTIONAL Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point). It is the total amount that includes the surcharge amount as well as the tip amount (if applied on the transaction).
aosa	int	OPTIONAL Available offline sending amount.
appCryptogram	string	OPTIONAL Cryptogram returned by the ICC in response of the GENERATE AC command
applabel	string	OPTIONAL Label of application.
authCode	string	OPTIONAL Code of the authorization.
availableBalance	string	OPTIONAL Balance of the available funds.
brand	string	OPTIONAL
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType
cardToken	string	OPTIONAL
cid	string	OPTIONAL Cryptogram Information Data Values: • 00 (AAC) - Application Authentication Cryptogram - A cryptogram generated by the card at the end of offline and online declined transactions • 40(TC) - Transaction Certificate-the result of card, terminal, and transaction data encrypted by a DES key • 80 (ARQC) - Authorization Request. Cryptogram-A cryptogram used for a process called Online Card Authentication.
cardHolderMessage	string	OPTIONAL Card issuer.
currency	int	OPTIONAL ISO 4217 currency code.
cvmTypeList	string array	OPTIONAL

		Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the result was made.
dccOffer	object	OPTIONAL dccOffer object
type	string	Card type. Possible values: • VISA • MASTERCARD • UNKNOWN
currency	string	Name of the DCC currency
amountExponent	int	Amount exponent. Indicates how many decimal places the amount is calculated.
convertedAmount	long	Converted amount
rateExponent	int	DCC rate exponent. Indicates how many decimal places the currency is calculated.
rate	long	Conversion rate
language	string	Language code
ecbRateExponent	int	European Central Bank rate exponent. Indicates how many decimal places the currency is calculated.
ecbRate	long	European Central Bank rate.
markup	int	Markup amount
currencyCode	int	Code of the DCC currency
dccResult	string	OPTIONAL DCC result. Possible values: • PERFORMED • NOT_PERFORMED
driverNumber	string	OPTIONAL ID number of the driver.
emvResponseData	object	OPTIONAL Object of the response. EmvResponseData
smartCardScheme	string	OPTIONAL Scheme of the smart card.
authorisationResponseCode	string	OPTIONAL The response code of authorization.
expiration	string	OPTIONAL Expiration date of the card.
externalTransactionId	string	OPTIONAL

		Transaction ID in an external system.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
isReversed	boolean	OPTIONAL Information whether the transaction was reversed.
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
merchantMessage	string	OPTIONAL Message for the merchant
monetToken	string	OPTIONAL
odometer	long	OPTIONAL Odometer reading (current mileage value).
pan	string	OPTIONAL Primary account number.
par	string	OPTIONAL
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
refundId	string	OPTIONAL ID of the refund transaction
responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response.
reversal	boolean	OPTIONAL Information if the transaction is a reversal or not.
sequenceNumber	string	OPTIONAL Number of the sequence.
surcharge	int	OPTIONAL Surcharged amount
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
tipAmount	integer	OPTIONAL Amount of the tip
transactionId	string	ID of the transaction.
transactionType	string	Transaction type. TransactionTypes

tokens	string array	OPTIONAL Encrypted combination of data.
vehicleCode	string	OPTIONAL Code of the vehicle.
driverNumber	String	OPTIONAL A unique identifier assigned to the driver operating the vehicle during the transaction.
licensePlate	String	OPTIONAL The official registration number of the vehicle, typically displayed on the vehicle's plates.
authorizationResponseCode	String	A three-character code returned by the issuer that indicates the result of the authorization request.

Result example v7:

```
{
  "aid": "A00000000283101",
  "amount": 500,
  "cashbackAmount": 1500,
  "aosa": "null",
  "appCryptogram": "5F52BA71C7B45441",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "brand": "MASTERCARD",
  "cardHolderMessage": "Approved",
  "cardInputType": "CLESS",
  "cid": "80",
  "currency": 203,
  "cvmTypeList": ["PIN_ONLINE"],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "driverNumber": "123456",
  "emvResponseData": {
    "smartCardScheme": "1",
    "authorisationResponseCode": "00"
  },
  "expiration": "****",
  "invoiceNumber": "VS",
  "isReversed": false,
  "merchantIdAcquirer": "TNEXGO01",
  "merchantIdIssuer": "1357",
  "merchantMessage": "Approved",
  "monetToken": "MONETTOKEN",
  "odometer": 65403,
  "pan": "970348*****3910",
  "par": "PAR",
  "panSequenceNumber": "00",
  "refundId": "1234567890",
  "responseCode": "OK",
  "responseMessage": "potvrzeno",
  "reversal": false,
  "sequenceNumber": "001001614",
  "tipAmount": 100,
```

```

    "terminalIdAcquirer": "M1TNEXGO01",
    "terminalIdIssuer": "M1TNEXGO01",
    "tokens": ["fkdfkjbejrh1jb"] //default - empty list
    "transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
    "transactionType": "SALE_ONLINE",
    "vehicleCode": "1A21234",
    "driverNumber": "DRIVER1",
    "licensePlate": "EL100AC",
    "authorizationResponseCode": "000"
  }

```

Result structure v8

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
amount	int	OPTIONAL Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point). It is the total amount that includes the surcharge amount as well as the tip amount (if applied on the transaction).
aosa	int	OPTIONAL Available offline sending amount.
appCryptogram	string	OPTIONAL Cryptogram returned by the ICC in response of the GENERATE AC command
appLabel	string	OPTIONAL Label of application.
authCode	string	OPTIONAL Code of the authorization.
availableBalance	string	OPTIONAL Balance of the available funds.
brand	string	OPTIONAL
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType
cardToken	string	OPTIONAL
cid	string	OPTIONAL Cryptogram Information Data Values: 00 (AAC) - Application Authentication Cryptogram – A cryptogram generated by the card at the end of offline and online declined transactions 40(TC) - Transaction Certificate-the result of card, terminal, and transaction data

		encrypted by a DES key • 80 (ARQC) – Authorization Request. Cryptogram-A cryptogram used for a process called Online Card Authentication.
cardHolderMessage	string	OPTIONAL Card issuer.
currency	int	OPTIONAL ISO 4217 currency code.
cvmTypeList	string array	OPTIONAL Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the result was made.
dccOffer	object	OPTIONAL dccOffer object
type	string	Card type. Possible values: • VISA • MASTERCARD • UNKNOWN
currency	string	Name of the DCC currency
amountExponent	int	Amount exponent. Indicates how many decimal places the amount is calculated.
convertedAmount	long	Converted amount
rateExponent	int	DCC rate exponent. Indicates how many decimal places the currency is calculated.
rate	long	Conversion rate
language	string	Language code
ecbRateExponent	int	European Central Bank rate exponent. Indicates how many decimal places the currency is calculated.
ecbRate	long	European Central Bank rate.
markup	int	Markup amount
currencyCode	int	Code of the DCC currency
dccResult	string	OPTIONAL DCC result. Possible values: • PERFORMED • NOT_PERFORMED
driverNumber	string	OPTIONAL ID number of the driver.
emvResponseData	object	OPTIONAL

		Object of the response. EmvResponseData
smartCardScheme	string	OPTIONAL Scheme of the smart card.
authorisationResponseCode	string	OPTIONAL The response code of authorization.
expiration	string	OPTIONAL Expiration date of the card.
externalTransactionId	string	OPTIONAL Transaction ID in an external system.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
isReversed	boolean	OPTIONAL Information whether the transaction was reversed.
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
merchantMessage	string	OPTIONAL Message for the merchant
monetToken	string	OPTIONAL
odometer	long	OPTIONAL Odometer reading (current mileage value).
pan	string	OPTIONAL Primary account number.
par	string	OPTIONAL
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
refundId	string	OPTIONAL ID of the refund transaction
responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response.
reversal	boolean	OPTIONAL Information if the transaction is a reversal or not.
sequenceNumber	string	OPTIONAL Number of the sequence.
surcharge	int	OPTIONAL Surcharged amount
terminalIdAcquirer	string	OPTIONAL

		ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
tipAmount	integer	OPTIONAL Amount of the tip
transactionId	string	ID of the transaction.
transactionType	string	Transaction type. TransactionTypes
tokens	string array	OPTIONAL Encrypted combination of data.
vehicleCode	String	OPTIONAL Code of the vehicle.
driverNumber	String	OPTIONAL A unique identifier assigned to the driver operating the vehicle during the transaction.
licensePlate	String	OPTIONAL The official registration number of the vehicle, typically displayed on the vehicle's plates.
authorizationResponseCode	String	A three-character code returned by the issuer that indicates the result of the authorization request.
transferId	String	OPTIONAL A unique identifier assigned to additional fee payment
additionalFeeAmount	Integer	OPTIONAL Amount of the additional fee applied to payment
systemTraceAuditNumber	String	OPTIONAL – RFU This field is not used yet, but will be supported in future releases
offlineIdentification	String	OPTIONAL – RFU This field is not used yet, but will be supported in future releases
gatewayUniqueTransactionId	String	OPTIONAL – RFU This field is not used yet, but will be supported in future releases

Result example v8:

```
{
  "aid": "A0000000283101",
  "amount": 500,
  "cashbackAmount": 1500,
  "aosa": "null",
  "appCryptogram": "5F52BA71C7B45441",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
```

```

"brand": "MASTERCARD",
"cardHolderMessage": "Approved",
"cardInputType": "CLESS",
"cid": "80",
"currency": 203,
"cvmTypeList": ["PIN_ONLINE"],
"dateTimeServer": "Jul 16, 2020 14:40:50",
"dateTimeTerminal": "Jul 16, 2020 14:39:37",
"driverNumber": "123456",
"emvResponseData": {
  "smartCardScheme": "1",
  "authorisationResponseCode": "00"
},
"expiration": "****",
"invoiceNumber": "VS",
"isReversed": false,
"merchantIdAcquirer": "TNEXGO01",
"merchantIdIssuer": "1357",
"merchantMessage": "Approved",
"monetToken": "MONETTOKEN",
"odometer": 65403,
"pan": "970348*****3910",
"par": "PAR",
"panSequenceNumber": "00",
"refundId": "1234567890",
"responseCode": "OK",
"responseMessage": "potvrzeno",
"reversal": false,
"sequenceNumber": "001001614",
"tipAmount": 100,
"terminalIdAcquirer": "M1TNEXGO01",
"terminalIdIssuer": "M1TNEXGO01",
"tokens": ["fkdfkjbejrhljb"] //default - empty list
"transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
"transactionType": "SALE_ONLINE",
"vehicleCode": "1A21234",
"driverNumber": "DRIVER1",
"licensePlate": "EL100AC",
"authorizationResponseCode": "000",
"transferId": "split-e529f8b4790f11e7b5a5be2e44b06b52",
"additionalFeeAmount": 200,
}

```

Result structure v9

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
amount	int	OPTIONAL Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point). It is the total amount that includes the surcharge amount as well as the tip amount (if applied on the transaction).

aosa	int	OPTIONAL Available offline sending amount.
appCryptogram	string	OPTIONAL Cryptogram returned by the ICC in response of the GENERATE AC command
appLabel	string	OPTIONAL Label of application.
authCode	string	OPTIONAL Code of the authorization.
availableBalance	string	OPTIONAL Balance of the available funds.
brand	string	OPTIONAL
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType
cardToken	string	OPTIONAL
cid	string	OPTIONAL Cryptogram Information Data Values: • 00 (AAC) - Application Authentication Cryptogram - A cryptogram generated by the card at the end of offline and online declined transactions • 40(TC) - Transaction Certificate-the result of card, terminal, and transaction data encrypted by a DES key • 80 (ARQC) - Authorization Request. Cryptogram-A cryptogram used for a process called Online Card Authentication.
cardHolderMessage	string	OPTIONAL Card issuer.
currency	int	OPTIONAL ISO 4217 currency code.
cvmTypeList	string array	OPTIONAL Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the result was made.
dccOffer	object	OPTIONAL dccOffer object
type	string	Card type. Possible values: • VISA • MASTERCARD • UNKNOWN

currency	string	Name of the DCC currency
amountExponent	int	Amount exponent. Indicates how many decimal places the amount is calculated.
convertedAmount	long	Converted amount
rateExponent	int	DCC rate exponent. Indicates how many decimal places the currency is calculated.
rate	long	Conversion rate
language	string	Language code
ecbRateExponent	int	European Central Bank rate exponent. Indicates how many decimal places the currency is calculated.
ecbRate	long	European Central Bank rate.
markup	int	Markup amount
currencyCode	int	Code of the DCC currency
dccResult	string	OPTIONAL DCC result. Possible values: - PERFORMED - NOT_PERFORMED
driverNumber	string	OPTIONAL ID number of the driver.
emvResponseData	object	OPTIONAL Object of the response. EmvResponseData
smartCardScheme	string	OPTIONAL Scheme of the smart card.
authorisationResponseCode	string	OPTIONAL The response code of authorization.
expiration	string	OPTIONAL Expiration date of the card.
externalTransactionId	string	OPTIONAL Transaction ID in an external system.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
isReversed	boolean	OPTIONAL Information whether the transaction was reversed.
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
merchantMessage	string	OPTIONAL Message for the merchant
monetToken	string	OPTIONAL

odometer	long	OPTIONAL Odometer reading (current mileage value).
pan	string	OPTIONAL Primary account number.
par	string	OPTIONAL
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
refundId	string	OPTIONAL ID of the refund transaction
responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response.
reversal	boolean	OPTIONAL Information if the transaction is a reversal or not.
sequenceNumber	string	OPTIONAL Number of the sequence.
surcharge	int	OPTIONAL Surcharged amount
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
tipAmount	integer	OPTIONAL Amount of the tip
transactionId	string	ID of the transaction.
transactionType	string	Transaction type. TransactionTypes
tokens	string array	OPTIONAL Encrypted combination of data.
vehicleCode	String	OPTIONAL Code of the vehicle.
driverNumber	String	OPTIONAL A unique identifier assigned to the driver operating the vehicle during the transaction.
licensePlate	String	OPTIONAL The official registration number of the vehicle, typically displayed on the vehicle's plates.
authorizationResponseCode	String	A three-character code returned by the issuer that

		indicates the result of the authorization request.
transferId	String	OPTIONAL A unique identifier assigned to additional fee payment
additionalFeeAmount	Integer	OPTIONAL Amount of the additional fee applied to payment
uniqueGatewayTransactionId	String	OPTIONAL Uniquely identifies the processed transaction and ensure unques across the system
systemTraceAuditNumber	String	OPTIONAL - RFU This field is not used yet, but will be supported in future releases
offlineIdentification	String	OPTIONAL - RFU This field is not used yet, but will be supported in future releases

Result structure v10

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
amount	int	OPTIONAL Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point). It is the total amount that includes the surcharge amount as well as the tip amount (if applied on the transaction).
aosa	int	OPTIONAL Available offline sending amount.
appCryptogram	string	OPTIONAL Cryptogram returned by the ICC in response of the GENERATE AC command
appLabel	string	OPTIONAL Label of application.
authCode	string	OPTIONAL Code of the authorization.
availableBalance	string	OPTIONAL Balance of the available funds.
brand	string	OPTIONAL
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType

cardToken	string	OPTIONAL
cid	string	OPTIONAL Cryptogram Information Data Values: • 00 (AAC) - Application Authentication Cryptogram - A cryptogram generated by the card at the end of offline and online declined transactions • 40(TC) - Transaction Certificate-the result of card, terminal, and transaction data encrypted by a DES key • 80 (ARQC) - Authorization Request. Cryptogram-A cryptogram used for a process called Online Card Authentication.
cardHolderMessage	string	OPTIONAL Card issuer.
currency	int	OPTIONAL ISO 4217 currency code.
cvmTypeList	string array	OPTIONAL Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the result was made.
dccOffer	object	OPTIONAL dccOffer object
type	string	Card type. Possible values: • VISA • MASTERCARD • UNKNOWN
currency	string	Name of the DCC currency
amountExponent	int	Amount exponent. Indicates how many decimal places the amount is calculated.
convertedAmount	long	Converted amount
rateExponent	int	DCC rate exponent. Indicates how many decimal places the currency is calculated.
rate	long	Conversion rate
language	string	Language code
ecbRateExponent	int	European Central Bank rate exponent. Indicates how many decimal places the currency is calculated.
ecbRate	long	European Central Bank rate.
markup	int	Markup amount

	currencyCode	int	Code of the DCC currency
	dccResult	string	OPTIONAL DCC result. Possible values: - PERFORMED - NOT_PERFORMED
	driverNumber	string	OPTIONAL ID number of the driver.
	emvResponseData	object	OPTIONAL Object of the response. EmvResponseData
	smartCardScheme	string	OPTIONAL Scheme of the smart card.
	authorisationResponseCode	string	OPTIONAL The response code of authorization.
	expiration	string	OPTIONAL Expiration date of the card.
	externalTransactionId	string	OPTIONAL Transaction ID in an external system.
	invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char.
	isReversed	boolean	OPTIONAL Information whether the transaction was reversed.
	merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
	merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
	merchantMessage	string	OPTIONAL Message for the merchant
	monetToken	string	OPTIONAL
	odometer	long	OPTIONAL Odometer reading (current mileage value).
	pan	string	OPTIONAL Primary account number.
	par	string	OPTIONAL
	panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
	refundId	string	OPTIONAL ID of the refund transaction
	responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
	responseMessage	string	OPTIONAL Message of the response.

reversal	boolean	OPTIONAL Information if the transaction is a reversal or not.
sequenceNumber	string	OPTIONAL Number of the sequence.
surcharge	int	OPTIONAL Surcharged amount
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
tipAmount	integer	OPTIONAL Amount of the tip
transactionId	string	ID of the transaction.
transactionType	string	Transaction type. TransactionTypes
tokens	string array	OPTIONAL Encrypted combination of data.
vehicleCode	String	OPTIONAL Code of the vehicle.
driverNumber	String	OPTIONAL A unique identifier assigned to the driver operating the vehicle during the transaction.
licensePlate	String	OPTIONAL The official registration number of the vehicle, typically displayed on the vehicle's plates.
authorizationResponseCode	String	A three-character code returned by the issuer that indicates the result of the authorization request.
transferId	String	OPTIONAL A unique identifier assigned to additional fee payment
additionalFeeAmount	Integer	OPTIONAL Amount of the additional fee applied to payment
uniqueGatewayTransactionId	String	OPTIONAL Uniquely identifies the processed transaction and ensure uniques across the system
systemTraceAuditNumber	String	OPTIONAL – RFU This field is not used yet, but will be supported in future releases
gastroConto	int	OPTIONAL – RFU This field is not used yet, but will be supported in future releases
offlineIdentification	String	OPTIONAL – RFU This field is not used yet, but will be supported in future

		releases
workOrderId	String	OPTIONAL Fleet card data: Work order
unencryptedId	String	OPTIONAL Fleet card data: Unencrypted ID number
closeLoopData	Object	OPTIONAL Close loop cards: Data of close loop card used for transaction
pocketIndex	String	Selected pocket
pocketName	String	OPTIONAL Selected pocket name
balance	String	OPTIONAL Remaining balance
pan	String	OPTIONAL Close loop card pan.
cardName	String	OPTIONAL Close loop card name

4. CONTROL ENDPOINTS

4.1. CLOSING BATCH

The closing batch request triggers the closing of a batch of transactions for the day. It should be done daily after the shift is finished.

4.1.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v1: URI = "paya://closing_batch"

ECR v2: URI = "paya://closing_batch_v2"

ECR v3: URI = "paya://closing_batch_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/closure"
ECR v5: URI = "app://switchiopay/api/main/v5/closure"
ECRv6: URI = "app://switchiopay/api/main/v6/closure"
ECRv7: URI = "app://switchiopay/api/main/v7/closure"
ECRv8: URI = "app://switchiopay/api/main/v8/closure"
ECRv9: URI = "app://switchiopay/api/main/v9/closure"
ECRv10: URI = "app://switchiopay/api/main/v10/closure"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://closing_batch
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/closure
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/closing_batch
- parameter value: request json

4.1.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
transactionType	string	Type of the transaction. In this case it is CLOSE BATCH
dateTimeServer	string	OPTIONAL Date and time on the server.
dateTimeTerminal	string	Date and time on the terminal.
responseCode	string	Response code. TerminalErrorCodes
responseMessage	string	OPTIONAL
batchTotals	object	
shiftNumber	int	Shift number.
batchNumber	int	Batch number.
debitsCount	int	Count of payment transactions.
debitsAmount	int	Amount of payment transactions.
creditsCount	int	Count of refund transactions.
creditsAmount	int	Amount of refund transactions.
adjsCount	int	Count of adjustments.
adjsAmount	int	Amount of adjustments.

Result example:

```
{
  "transactionType": "CLOSE_BATCH",
  "dateTimeTerminal": "Jul 16, 2020 14:40:50",
  "dateTimeServer": "Jul 16, 2020 14:41:10",
  "responseCode": "OK",
  "responseMessage": "Success",
  "batchTotals": {
    "shiftNumber": 1,
    "batchNumber": 1,
    "debitsCount": 1000,
    "debitsAmount": 5,
    "creditsCount": 1000,
    "creditsAmount": 5,
    "adjsCount": 1000,
    "adjsAmount": 5
  }
}
```

4.2. DAUGHTER COMPANIES

Get list of available daughter companies if virtualization is enabled.

4.2.1. Request

This operation has no request data.

ECR v1: URI = "paya://daughter_companies"
 ECR v2: URI = "paya://daughter_companies_v2"
 ECR v3: URI = "paya://daughter_companies_v3"
 ECR v4: URI = "app://switchiopay/api/light/v4/daughter_companies"
 ECR v5: URI = "app://switchiopay/api/light/v5/daughter_companies"
 ECR v6: URI = "app://switchiopay/api/light/v6/daughter_companies"
 ECR v7: URI = "app://switchiopay/api/light/v7/daughter_companies"
 ECR v8: URI = "app://switchiopay/api/light/v8/daughter_companies"
 ECR v9: URI = "app://switchiopay/api/light/v9/daughter_companies"
 ECR v10: URI = "app://switchiopay/api/light/v10/daughter_companies"

Bundle result key = "daughter_companies"

Example request for ECR v1:

```
paya://daughter_companies
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/daughter_companies
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v4/daughter_companies

4.2.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.

Result example:

```
[
  {
    "daughterCompanyId": "COMPANY1"
  },
  {
    "daughterCompanyId": "COMPANY2"
  },
  {
    "daughterCompanyId": "COMPANY3"
  }
]
```

```
}
]
```

4.3. SCANNER

Scans a QR code and returns a raw unformatted result.

4.3.1. Request

This operation has no request data.

ECR v1: URI = "paya://scan"
ECR v2: URI = "paya://scan_v2"
ECR v3: URI = "paya://scan_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/scan"
ECR v5: URI = "app://switchiopay/api/main/v5/scan"
ECR v6: URI = "app://switchiopay/api/main/v6/scan"
ECR v7: URI = "app://switchiopay/api/main/v7/scan"
ECR v8: URI = "app://switchiopay/api/main/v8/scan"
ECR v9: URI = "app://switchiopay/api/main/v9/scan"
ECR v10: URI = "app://switchiopay/api/main/v10/scan"

Bundle result key = "data"

Example request for ECR v1:

```
paya://scan
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/scan
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/scan

4.3.2. Result

Result structure:

```
<string>
```

Result example:

```
www.google.com
```

4.4. UPDATE TERMINAL CONFIGURATION

Call the TMS and download a new terminal configuration.

4.4.1. Request

PARAMETER	TYPE	DESCRIPTION
login	string	Login of the terminal.
password	string	Password of the terminal.
host	string	IP address/hostname of the TMS server.
port	int	Port that the TMS server is listening on.

ECR v1: URI = "paya://tms_update"
ECR v2: URI = "paya://tms_update"
ECR v3: URI = "paya://tms_update"
ECR v4: URI = "app://switchiopay/api/main/v4/tms_update"
ECR v5: URI = "app://switchiopay/api/config/v5/tms_update"
ECR v6: URI = "app://switchiopay/api/config/v6/tms_update"
ECR v7: URI = "app://switchiopay/api/config/v7/tms_update"
ECR v8: URI = "app://switchiopay/api/config/v8/tms_update"
ECR v9: URI = "app://switchiopay/api/config/v9/tms_update"
ECR v10: URI = "app://switchiopay/api/config/v10/tms_update"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://tms_update?data={"login":"TERMINAL01", "password": "123456789",
"host":"127.0.0.1", "port":7777}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/tms_update?data={"login":"TERMINAL01",
"password": "123456789", "host":"127.0.0.1", "port":7777}
```

Example request for ECR v5:

```
app://switchiopay/api/config/v5/tms_update?data={"login":"TERMINAL01",
"password": "123456789", "host":"127.0.0.1", "port":7777}
```

Additional info for building uri with Uri.Builder(), available for ECR v4:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/tms_update
- parameter key: data
- parameter value: request json

Additional info for building uri with Uri.Builder(), available for ECR v5:

- scheme: app
- authority: switchiopay

- api: config
- path: /api/config/v5/tms_update
- parameter key: data
- parameter value: request json

4.4.2. Result

See [result structure](#).

Result example:

```
{
  "transactionId": "",
  "transactionType": "UNDEFINED",
  "reversal": false,
  "dateTimeTerminal": "Apr 30, 2023 02:06:01 PM",
  "responseCode": "OK",
  "responseMessage": "TMS MANUAL call was success."
}
```

4.5. TOUCH – AUTOMATIC CONFIGURATION UPDATE

Starting with version 2.2.0, Switchio Pay application supports automatic TMS configuration updates. Application periodically checks its configuration state with the TMS and broadcasts the status. In the ECR mode, Switchio Pay application handles only one event by itself – UpdateImmediately. Every other event should be handled by the cash register.

4.5.1. Broadcast

Broadcast action = "paya.tmsparam.status"

Broadcast bundle key = "tmsParamStatus"

Status:

STATUS	DESCRIPTION
UpToDate	No action needed.
UpdateRequired	Terminal configuration should be updated as soon as possible.
UpdateImmediately	Terminal configuration should be updated immediately. Switchio Pay handles this event by itself, the cash register does not need to implement this. Switchio Pay will not interrupt any payment process with configuration updates.
UpdateAfterClosing	Terminal configuration should be updated after a successful closing.
UpdateAtSpecificTime	Terminal configuration should be updated at the provided time. (hour: <integer>, minute: <integer>)
Undefined	Unknown data received from the server.
UndefinedInvalidData	Invalid data received from the server.

Broadcast receiver example:

```
class TmsParamStatusBroadcastReceiver @Inject constructor() : BroadcastReceiver() {
    lateinit var listener: (TmsParamStatus) -> Unit
    override fun onReceive(context: Context, intent: Intent) {
        if (intent.action == ACTION) {
            val tmsParamStatusData = intent.extras?.getString(KEY_STATUS) ?: return
            val tmsParamStatus = Json.decodeFromString(TmsParamStatus.serializer(),
tmsParamStatusData)
            listener(tmsParamStatus)
        }
    }
    companion object {
        private const val ACTION = "paya.tmsparam.status"
        private const val KEY_STATUS = "tmsParamStatus"
    }
}
```

Upon receiving a TMS param status, the cash register should schedule the TMS configuration update. Switchio Pay provides an API for TMS configuration update without the need of providing credentials.

4.5.2. Request

This operation has no request data.

ECR v1: URI = "paya://tms_auto_update"
 ECR v2: URI = "paya://tms_auto_update_v2"
 ECR v3: URI = "paya://tms_auto_update_v3"
 ECR v4: URI = "app://switchiopay/api/config/v4/tms_auto_update"
 ECR v5: URI = "app://switchiopay/api/config/v5/tms_auto_update"
 ECR v6: URI = "app://switchiopay/api/config/v6/tms_auto_update"
 ECR v7: URI = "app://switchiopay/api/config/v7/tms_auto_update"
 ECR v8: URI = "app://switchiopay/api/config/v8/tms_auto_update"
 ECR v9: URI = "app://switchiopay/api/config/v9/tms_auto_update"
 ECR v10: URI = "app://switchiopay/api/config/v10/tms_auto_update"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://tms_auto_update
```

Example request for ECR v4:

```
app://switchiopay/api/config/v4/tms_auto_update
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: config
- path: /api/config/v4/tms_auto_update
- parameter value: request json

4.5.3. Result

See [result structure](#).

Result example:

```
{
  "transactionId": "",
  "transactionType": "UNDEFINED",
  "reversal": false,
  "dateTimeTerminal": "Apr 30, 2023 02:06:01 PM",
  "responseCode": "OK",
  "responseMessage": "TMS MANUAL call was success."
}
```

4.6. SUBTOTAL

Returns the current subtotal of the transactions made. It can be done any time of the day and it does not trigger closing.

4.6.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v1: URI = "paya://subtotal"

ECR v2: URI = "paya://subtotal_v2"

ECR v3: URI = "paya://subtotal_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/subtotal"

ECR v5: URI = "app://switchiopay/api/main/v5/subtotal"

ECR v6: URI = "app://switchiopay/api/main/v6/subtotal"

ECR v7: URI = "app://switchiopay/api/main/v7/subtotal"

ECR v8: URI = "app://switchiopay/api/main/v8/subtotal"

ECR v9: URI = "app://switchiopay/api/main/v9/subtotal"

ECR v10: URI = "app://switchiopay/api/main/v10/subtotal"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://subtotal
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/subtotal
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/subtotal
- parameter value: request json

4.6.2. Result

See [Closing batch](#).

4.7. HANDSHAKE

Handshake with the authorization server.

4.7.1. Request

This operation has no request data.

ECR v1: URI = "paya://handshake"
 ECR v2: URI = "paya://handshake_v2"
 ECR v3: URI = "paya://handshake_v3"
 ECR v4: URI = "app://switchiopay/api/main/v4/handshake"
 ECR v5: URI = "app://switchiopay/api/main/v5/handshake"
 ECR v6: URI = "app://switchiopay/api/main/v6/handshake"
 ECR v7: URI = "app://switchiopay/api/main/v7/handshake"
 ECR v8: URI = "app://switchiopay/api/main/v8/handshake"
 ECR v9: URI = "app://switchiopay/api/main/v9/handshake"
 ECR v10: URI = "app://switchiopay/api/main/v10/handshake"

Bundle result key = "transaction_result"

Example request for ECR v1:

paya://handshake

Example request for ECR v4:

app://switchiopay/api/main/v4/handshake

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/handshake
- parameter value: request json

4.7.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
transactionType	string	Type of the transaction. In this case, it is HANDSHAKE.
responseCode	string	Code of the response. TerminalErrorCodes
responseMessage	string	Message of the response.

Result example:

```
{
  "transactionId": "89555389-4f67-4cb0-ae8-544ea11dbd1c",
  "transactionType": "HANDSHAKE",
  "terminalErrorCodes": "OK",
  "responseMessage": "Success"
}
```

4.8. TOKEN

ECR protocol supports a token generator running in the background. Application has control of turning on and off the card detection and a token generation via the ECR protocol. Once the token generator is turned on, the token will be broadcasted from the payment application. The client application is able to receive the token by implementing the BroadcastReceiver. After the response from the payment application, start the generator again to generate another token.

Make sure you stop the token generator as well as unregister the broadcast receiver after you are done to prevent excessive battery usage and memory leaks.

4.8.1. Request

```
start
stop
```

ECR v1: URI = "paya://token"
ECR v2: URI = "paya://token_v2"
ECR v3: URI = "paya://token_v3"
ECR v4: URI = "app://switchiopay/api/light/v4/token"
ECR v5: URI = "app://switchiopay/api/light/v5/token"
ECR v6: URI = "app://switchiopay/api/light/v6/token"
ECR v7: URI = "app://switchiopay/api/light/v7/token"
ECR v8: URI = "app://switchiopay/api/light/v8/token"
ECR v9: URI = "app://switchiopay/api/light/v9/token"
ECR v10: URI = "app://switchiopay/api/light/v10/token"

Bundle result key = "data"

Example request for ECR v1:

```
paya://token?action=start
paya://token?action=stop
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/token?action=start
app://switchiopay/api/light/v4/token?action=stop
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v4/token
- parameter value: request json

4.8.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
resultCode	int	0 – Success 1 – Unknown error 2 – Unknown card
maskedCardNumber	string	Partially hidden card number
tokens	string array	Encrypted combination of data.
expiration	string	Card expiration date.
cardUid	string	Optional – card chip number

Result example v1:

```
{
  "resultCode": 0,
  "maskedCardNumber": "970348*****3910",
  "tokens": ["8798F7W98723KDGF08723HKDJHF897"],
}
```

Result example v4:

```
{
  "resultCode": 0,
  "maskedCardNumber": "970348*****3910",
  "tokens": ["8798F7W98723KDGF08723HKDJHF897"],
  "expiration": "****",
  "cardUid": "a1234567890"
}
```

4.9. GET LAST TRANSACTION

Request returns last transaction from the terminal.

4.9.1. Request

This operation has no request data.

ECR v1: URI = "paya://get_last_transaction"

ECR v2: URI = "paya://get_last_transaction_v2"

ECR v3: URI = "paya://get_last_transaction_v3"

ECR v4: URI = "app://switchiopay/api/light/v4/get_last_transaction"

ECR v5: URI = "app://switchiopay/api/light/v5/get_last_transaction"

ECR v6: URI = "app://switchiopay/api/light/v6/get_last_transaction"

ECR v7: URI = "app://switchiopay/api/light/v7/get_last_transaction"

ECR v8: URI = "app://switchiopay/api/light/v8/get_last_transaction"

ECR v9: URI = "app://switchiopay/api/light/v9/get_last_transaction"

ECR v10: URI = "app://switchiopay/api/light/v10/get_last_transaction"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://get_last_transaction
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/get_last_transaction
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v4/get_last_transaction
- parameter value: request json

4.9.2. Result

See [result structure](#).

Result example:

```
{
  "aid": "A0000000283101",
  "amount": 500,
  "aosa": "null",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "brand": "MASTERCARD",
  "cardHolderMessage": "Approved",
  "cardInputType": "CLESS",
  "currency": 203,
  "cvmTypeList": ["PIN_ONLINE"],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "emvResponseData": {
    "smartCardScheme": "1",
    "authorisationResponseCode": "00"
  },
  "expiration": "****",
  "invoiceNumber": "VS",
  "isReversed": false,
  "merchantIdAcquirer": "TNEXGO01",
  "merchantIdIssuer": "1357",
  "merchantMessage": "Approved",
  "pan": "970348*****3910",
  "panSequenceNumber": "00",
  "refundId": "1234567890",
  "responseCode": "OK",
  "responseMessage": "potvrzeno",
  "reversal": false,
  "sequenceNumber": "001001614",
  "tipAmount": 100,
  "terminalIdAcquirer": "M1TNEXGO01",
  "terminalIdIssuer": "M1TNEXGO01",
  "transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
  "transactionType": "SALE_ONLINE",
  "tokens": ["fkdfkjbejrhjlb"] //default - empty list
}
```

4.10. GET ALL SUCCESSFUL TRANSACTIONS

Application returns list of successful transactions from the terminal.

4.10.1. Request

This operation has no request data.

ECR v1: URI = "paya://get_transactions"
ECR v2: URI = "paya://get_transactions_v2"
ECR v3: URI = "paya://get_transactions_v3"
ECR v4: URI = "app://switchiopay/api/light/v4/get_transactions"
ECR v5: URI = "app://switchiopay/api/light/v5/get_transactions"
ECR v6: URI = "app://switchiopay/api/light/v6/get_transactions"
ECR v7: URI = "app://switchiopay/api/light/v7/get_transactions"
ECR v8: URI = "app://switchiopay/api/light/v8/get_transactions"
ECR v9: URI = "app://switchiopay/api/light/v9/get_transactions"
ECR v10: URI = "app://switchiopay/api/light/v10/get_transactions"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://get_transactions
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/get_transactions
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v4/get_transactions
- parameter value: request json

4.10.2. Result

Array of [result structure](#).

Result example:

```
[
{
  "aid": "A0000000283101",
  "amount": 500,
  "aosa": "null",
  "appLabel": "Air Bank",
  "authCode": "114546",
  "availableBalance": "1000",
  "brand": "MASTERCARD",
  "cardHolderMessage": "Approved",
  "cardInputType": "CLESS",
  "currency": 203,
  "cvmTypeList": ["PIN_ONLINE"],
  "dateTimeServer": "Jul 16, 2020 14:40:50",
  "dateTimeTerminal": "Jul 16, 2020 14:39:37",
  "emvResponseData": {
    "smartCardScheme": "1",
    "authorisationResponseCode": "00"
  },
  "expiration": "****",
  "invoiceNumber": "VS",
  "isReversed": false,
  "merchantIdAcquirer": "TNEXGO01",
  "merchantIdIssuer": "1357",
  "merchantMessage": "Approved",
  "pan": "970348*****3910",
  "panSequenceNumber": "00",
  "refundId": "1234567890",
  "responseCode": "OK",
  "responseMessage": "potvrzeno",
  "reversal": false,
  "sequenceNumber": "001001614",
  "tipAmount": 100,
  "terminalIdAcquirer": "M1TNEXGO01",
  "terminalIdIssuer": "M1TNEXGO01",
  "transactionId": "48a3ea7d-b82f-4b42-abbb-5043365e4faa",
  "transactionType": "SALE_ONLINE",
  "tokens": ["fkdfkjbejrh1jb"] //default - empty list
}
]
```

4.11. GET OFFLINE PAYMENTS STATUS

Request returns status of all pending offline payments.

4.11.1. Request

This operation has no request data.

ECR v10: URI = "app://switchiopay/api/light/v10/get_offline_payments_status"

Bundle result key = "data"

Example request for ECR v10:

```
app://switchiopay/api/light/v10/get_offline_payments_status
```

Additional info for building uri with Uri.Builder(), available for ECR v10::

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v10/get_offline_payments_status
- parameter value: request json

4.11.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
pendingCount	int	Total number of offline payments pending submission for online authorization
deadlineTimestamp	Long	OPTIONAL Deadline by which offline payments should be submitted for online authorization

Result example:

```
{
  "pendingCount": 5,
  "deadlineTimestamp": 1776669246156
}
```

No pending offline payments result example:

```
{
  "pendingCount": 0
}
```

4.12. CARD VERIFY

Authorize a transaction with zero amount to verify the card and return the token.

4.12.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.

ECR v1: URI = "paya://card_verify"
ECR v2: URI = "paya://card_verify_v2"
ECR v3: URI = "paya://card_verify_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/card_verify"
ECR v5: URI = "app://switchiopay/api/main/v5/card_verify"
ECR v6: URI = "app://switchiopay/api/main/v6/card_verify"
ECR v7: URI = "app://switchiopay/api/main/v7/card_verify"
ECR v8: URI = "app://switchiopay/api/main/v8/card_verify"
ECR v9: URI = "app://switchiopay/api/main/v9/card_verify"
ECR v10: URI = "app://switchiopay/api/main/v10/card_verify"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://card_verify?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/card_verify?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/card_verify
- parameter key: data
- parameter value: request json

4.12.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
aid	string	OPTIONAL Application identifier.
appLabel	string	OPTIONAL Label of application.

authCode	string	OPTIONAL Code of the authorization.
cardHolderMessage	string	OPTIONAL Message for cardholder.
cardInputType	string	OPTIONAL Type of the input. Enum is in the CardInputType
brand	string	OPTIONAL Card brand.
cvmTypeList	string array	OPTIONAL Type of the transaction. CvmType
dateTimeServer	string	OPTIONAL Date and time on the server when the result was made.
dateTimeTerminal	string	OPTIONAL Date and time on the terminal when the result was made.
expiration	string	OPTIONAL Expiration date of the card.
merchantIdAcquirer	string	OPTIONAL ID of the merchant's acquirer.
merchantIdIssuer	string	OPTIONAL ID of the merchant's issuer.
merchantMessage	string	OPTIONAL Message for merchant.
pan	string	OPTIONAL Primary account number.
panSequenceNumber	string	OPTIONAL Sequence number of the primary account number.
responseCode	string	OPTIONAL Code of the response. TerminalErrorCodes
responseMessage	string	OPTIONAL Message of the response.
sequenceNumber	string	OPTIONAL Number of the sequence.
terminalIdAcquirer	string	OPTIONAL ID of the acquirer's terminal.
terminalIdIssuer	string	OPTIONAL ID of the issuer's terminal.
transactionId	string	ID of the transaction.
transactionType	string	Transaction type. TransactionTypes
cardToken	string	OPTIONAL Encrypted combination of data.
par	string	OPTIONAL Card PAR number

transactionReference	string	OPTIONAL Transaction reference number
-----------------------------	--------	--

Result example for v5:

```
{
  "transactionId": "transactionId",
  "transactionType": "CARD_VERIFY",
  "aid": "A10000000000003",
  "appLabel": "MASTERCARD",
  "authCode": "auth",
  "brand": "Mastercard",
  "dateTimeTerminal": "May 13, 2023 02:28:56 PM",
  "dateTimeServer": "May 13, 2023 02:28:56 PM",
  "expiration": "***",
  "responseCode": "OK",
  "responseMessage": "OK",
  "terminalIdAcquirer": "MONETPLUS_ACQ",
  "terminalIdIssuer": "MONETPLUS_ISS",
  "merchantIdAcquirer": "MONETPLUS_ACQ",
  "merchantIdIssuer": "MONETPLUS_ISS",
  "pan": "1111222233334444",
  "panSequenceNumber": "01",
  "merchantMessage": "Have a nice day",
  "sequenceNumber": "00100200",
  "cvmTypeList": [
    "NO"
  ],
  "cardInputType": "CLESS",
  "cardToken": "cardtoken",
  "par": "par",
  "transactionReference": "transactionReference"
}
```

4.13. SETTINGS

This request opens Settings in the Switchio Pay application.

4.13.1. Request

ECR v1: URI = "paya://settings"
ECR v2: URI = "paya://settings_v2"
ECR v3: URI = "paya://settings_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/settings"
ECR v5: URI = "app://switchiopay/api/main/v5/settings"
ECR v6: URI = "app://switchiopay/api/main/v6/settings"
ECR v7: URI = "app://switchiopay/api/main/v7/settings"
ECR v8: URI = "app://switchiopay/api/main/v8/settings"
ECR v9: URI = "app://switchiopay/api/main/v9/settings"
ECR v10: URI = "app://switchiopay/api/main/v10/settings"

Example request for ECR v1:

```
paya://settings
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/settings
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/settings
- parameter key: data
- parameter value: request json

4.13.2. Result

As a result of this request, Switchio Pay application opens. When Switchio Pay is closed, the 3rd party cash register application opens automatically.

4.14. OPEN PREAUTHORIZATIONS

Gets a list of all open pre-authorized transactions.

4.14.1. Request

PARAMETER	TYPE	DESCRIPTION
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.

ECR v1: URI = "paya://preauth_transactions"
ECR v2: URI = "paya://preauth_transactions_v2"
ECR v3: URI = "paya://preauth_transactions_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/preauth_transactions"
ECR v5: URI = "app://switchiopay/api/main/v5/preauth_transactions"
ECR v6: URI = "app://switchiopay/api/main/v6/preauth_transactions"
ECR v7: URI = "app://switchiopay/api/main/v7/preauth_transactions"
ECR v8: URI = "app://switchiopay/api/main/v8/preauth_transactions"
ECR v9: URI = "app://switchiopay/api/main/v9/preauth_transactions"
ECR v10: URI = "app://switchiopay/api/main/v10/preauth_transactions"

Bundle result key = "transaction_result"

Example request for ECR v1:

paya://preauth_transactions

Example request for ECR v4:

app://switchiopay/api/main/v4/preauth_transactions

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/preauth_transactions
- parameter value: request json

4.14.2. Result

Result is a list of [result structure](#).

Result example for v5:

```
[
{
  "transactionId": "37a0382e-cc83-44c1-b94e-732ad74380a5",
  "transactionType": "PREAUTHORIZATION",
  "aid": "A0000000043010",
  "amount": 14900,
  "appLabel": "MASTERCARD",
  "authCode": "123456",
  "reversal": false,
  "brand": "MASTERCARD",
  "currency": 203,
```

```
"dateTimeTerminal": "Oct 09, 2023 02:43:06 PM",
"dateTimeServer": "Oct 09, 2023 02:43:06 PM",
"emvResponseData": {
  "smartCardScheme": 0,
  "authorisationResponseCode": "3030",
  "issuerAuthenticationData": "FFFF"
},
"expiration": "****",
"invoiceNumber": "",
"responseCode": "OK",
"responseMessage": "OK",
"terminalIdAcquirer": "TDEMOD01",
"terminalIdIssuer": "terminalIdIssuer",
"merchantIdAcquirer": "M1TDEMOD01",
"merchantIdIssuer": "merchantIdIssuer",
"pan": "541333*****9130",
"tokens": [
  "FFFF"
],
"panSequenceNumber": "01",
"aosa": 14901,
"cardHolderMessage": "Authorized",
"merchantMessage": "authorized",
"availableBalance": "14902",
"sequenceNumber": "001001001",
"cvmTypeList": [
  "PIN_ONLINE"
],
"cardInputType": "CLESS",
"refundId": "refundId",
"par": "1234567890",
"cardToken": "token"
}
]
```

4.15. INITIALIZE TERMINAL

Initialize the terminal before the first start or force initialization to wipe out the app storage and download a new configuration.

4.15.1. Request

PARAMETER	TYPE	DESCRIPTION
isForceInit	boolean	OPTIONAL true to initialize the terminal even if it has been already initialized before, false to initialize only if necessary, default is false

Bundle result key = "data"

Example request for ECR v6:

```
app://switchiopay/api/config/v6/init?data={"isForceInit":true}
```

Additional info for building uri with Uri.Builder(), available for ECR v6:

scheme: app

authority: switchiopay

api: config

path: /api/config/v6

endpoint: init

4.15.2. Result

PARAMETER	TYPE	DESCRIPTION
Result	string	Overall initialization result Possible values: OK - Initialization successful ERROR - Initialization failed
ttkStatus	string	Possible values: OK - Master key OK NOT_FOUND - The master key has not been found. The master key needs to be injected into the terminal
configurationStatus	string	Possible values: OK - Configuration OK ALREADY_INITIALIZED - Configuration has been already initialized, skipping initialization UNKNOWN - Configuration status is not known because of other error, for example missing master key CREDENTIALS_ERROR - Configuration has not been downloaded because of invalid TMS credentials DOWNLOAD_ERROR - Configuration downloading failed FAILED - Downloaded configuration is corrupted

configurationDownload Message	string	Result message of the configuration download.
configurationInit Message	string	Result message of the configuration Init status.
tid	string	Terminal ID
handshakeStatus	string	Possible values: OK – Authorization server handshake successful FAILED – Authorization server handshake failed NOT_PERFORMED – Handshake has been skipped because of another error or the terminal is in the transport mode
handshakeMessage	string	Result message of the handshake status.

Definition of Result structure for v6:

```
{
  "result":<Result>,
  "appInitInfo":{
    "ttkStatus":<TtkStatus>,
    "configurationStatus":<ConfigurationStatus>,
    "configurationDownloadMessage":<string>,
    "configurationInitMessage":<string>,
    "tid":<string>,
    "handshakeStatus":<HandshakeStatus>,
    "handshakeMessage":<string>
  }
}
```

Result example for v6:

```
{
  "result":"OK",
  "appInitInfo":{
    "ttkStatus":"OK",
    "configurationStatus":"OK",
    "configurationDownloadMessage":"OK",
    "configurationInitMessage":"OK",
    "tid":"TPAX0001",
    "handshakeStatus":"OK",
    "handshakeMessage":"OK"
  }
}
```

4.16. SUBMIT OFFLINE PAYMENTS

Submits all pending offline payments for online authorization.

4.16.1. Request

Bundle result key = "data"

Example request for ECR v10:

```
app://switchiopay/api/main/v10/submit_offline_payments
```

Additional info for building uri with Uri.Builder(), available for ECR v10:

scheme: app

authority: switchiopay

api: main

path: /api/main/v10

parameter value: request json

4.16.2. Result

PARAMETER	TYPE	DESCRIPTION
status	Status	The status of offline payments submission Possible values: Success - Submission completed successfully AlreadyInProgress - A submission is already running in the background Failure - Submission failed
submittedCount	int	OPTIONAL The number of offline payments successfully submitted

Definition of result structure for v10:

```
{
  "status":<Status>,
  "submittedCount":<Int>
}
```

Success result example for v10:

```
{
  "status":"Success",
  "submittedCount":10
}
```

Already in progress result example for v10:

```
{
  "status":"AlreadyInProgress"
}
```

Failure result example for v10:

```
{
  "status":"Failure"
}
```

4.17. CANCEL TRANSACTION

Allows canceling of a transaction. The cancellation is possible in states **"WaitForCard"** or **"WaitForUserInput"**, otherwise, the request is rejected.

4.17.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.

Action:

```
com.switchio.ecr.action.CANCEL_REQUEST
```

Permission:

```
com.switchio.permission.ECR
```

Target package examples:

```
cz.co.payment.paya_pax
```

```
cz.co.payment.paya_nexgo
```

Please verify platform-specific package prior to implementation, as each target platform uses a distinct application package.

Register custom permission inside AndroidManifest example:

XML

```
<uses-permission android:name="com.switchio.permission.ECR" />
```

Broadcast call example:

Kotlin

```
val intent = Intent("com.switchio.ecr.action.CANCEL_REQUEST").apply {
    setPackage("cz.co.payment.paya_pax")
    putExtra("transactionId", "5b31939f-7d90-475e-b3d7-f6fc9ae6561c")
}
```

```
application.sendBroadcast(intent)
```

4.17.2. Result

Success result

When a cancellation succeeds, the activity result returns `TransactionResult` with cancellation error code.

Failure result

PARAMETER	TYPE	DESCRIPTION
transactionId	string	The id of transaction sent for cancellation

status	string	NotAllowed NotFound
---------------	--------	--------------------------------------

Not allowed example:

```
JSON
{
  "transactionId": "5b31939f-7d90-475e-b3d7-f6fc9ae6561c",
  "status": "NotAllowed"
}
```

Not found example:

```
JSON
{
  "transactionId": "5b31939f-7d90-475e-b3d7-f6fc9ae6561c",
  "status": "NotFound"
}
```

Receive cancel request result example:

```
Kotlin
private val cancelReceiver = object : BroadcastReceiver() {
    override fun onReceive(context: Context?, intent: Intent?) {
        handleResult(intent)
    }
}

override fun onStart() {
    super.onStart()
    ContextCompat.registerReceiver(
        context,
        cancelReceiver,
        IntentFilter("com.switchio.ecr.action.CANCEL_REQUEST"),
        ContextCompat.RECEIVER_EXPORTED
    )
}

override fun onStop() {
    super.onStop()
    try {
        unregisterReceiver(cancelReceiver)
    } catch (_: IllegalArgumentException) {
        // Receiver not registered
    }
}
```

4.18. TRANSACTION STATE

Allows observing the current state of the transaction.

4.18.1. Result

Action:

```
com.switchio.ecr.action.TRANSACTION_STATE
```

Permission:

```
com.switchio.permission.ECR
```

Register receiver:

```
Kotlin
ContextCompat.registerReceiver(
    context,
    EcrTransactionStateBroadcastReceiver(),
    IntentFilter("com.switchio.ecr.action.TRANSACTION_STATE"),
    ContextCompat.RECEIVER_EXPORTED,
)
```

Receive transaction state response example:

```
JSON
{
  "transactionId": "5b31939f-7d90-475e-b3d7-f6fc9ae6561c",
  "status": "Finished"
}
```

See transaction state enumerations [here](#)

5. RETAIL ENDPOINTS

5.1. PAYMENT

Perform a payment transaction with specified amount, currency, invoice number and optional tip.

5.1.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
tipAmount	int	OPTIONAL Amount of the tip.
additionalFeeAmount	int	OPTIONAL Amount of additional fee.
currencyCode	int	Code of the currency. ISO 4217 currency code
invoice Number	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
offlineIdentification	string	OPTIONAL Customer offline identification in OFFLINE/HYBRID auth mode

ECR v1: URI = "paya://payment"

ECR v2: URI = "paya://payment_v2"

ECR v3: URI = "paya://payment_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/payment"

ECR v5: URI = "app://switchiopay/api/main/v5/payment"

ECR v6: URI = "app://switchiopay/api/main/v6/payment"
ECR v7: URI = "app://switchiopay/api/main/v7/payment"
ECR v8: URI = "app://switchiopay/api/main/v8/payment"
ECR v9: URI = "app://switchiopay/api/main/v9/payment"
ECR v10: URI = "app://switchiopay/api/main/v10/payment"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://payment?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "tipAmount": 300, "currencyCode": 978, "invoiceNumber": "123456"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/payment?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "tipAmount": 300, "currencyCode": 978, "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/payment
- parameter key: data
- parameter value: request json

5.1.2. Result

See [result structure](#) and [result examples](#).

5.2. REFUND

Perform a refund transaction with specified amount, currency and invoice number.

5.2.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
currencyCode	int	Code of the currency. ISO 4217 currency code
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v1: URI = "paya://refund"

ECR v2: URI = "paya://refund_v2"

ECR v3: URI = "paya://refund_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/refund"

ECR v5: URI = "app://switchiopay/api/main/v5/refund"

ECR v6: URI = "app://switchiopay/api/main/v6/refund"

ECR v7: URI = "app://switchiopay/api/main/v7/refund"

ECR v8: URI = "app://switchiopay/api/main/v8/refund"

ECR v9: URI = "app://switchiopay/api/main/v9/refund"

ECR v10: URI = "app://switchiopay/api/main/v10/refund"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://refund?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "tipAmount": 300, "currencyCode": 978, "invoiceNumber": "123456"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/refund?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "tipAmount": 300, "currencyCode": 978, "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/refund
- parameter key: data
- parameter value: request json

5.2.2. Result

See [result structure](#) and [result examples](#).

5.3. PREAUTHORIZATION

Performs a pre-authorization with a specified amount, currency and invoice number. To process a pre-authorization, it is required to tap or insert a payment card.

5.3.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
currencyCode	int	Code of the currency. ISO 4217 currency code
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined

from terminal configuration.
PRINT - Receipt will be printed.
NO_PRINT - Receipt will not be printed.

ECR v1: URI = "paya://preauth"
ECR v2: URI = "paya://preauth_v2"
ECR v3: URI = "paya://preauth_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/preauth"
ECR v5: URI = "app://switchiopay/api/main/v5/preauth"
ECR v6: URI = "app://switchiopay/api/main/v6/preauth"
ECR v7: URI = "app://switchiopay/api/main/v7/preauth"
ECR v8: URI = "app://switchiopay/api/main/v8/preauth"
ECR v9: URI = "app://switchiopay/api/main/v9/preauth"
ECR v10: URI = "app://switchiopay/api/main/v10/preauth"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://preauth?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "tipAmount": 300, "currencyCode": 978, "invoiceNumber": "123456"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/preauth?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "tipAmount": 300, "currencyCode": 978, "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/preauth
- parameter key: data
- parameter value: request json

5.3.2. Result

See [result structure](#) and [result examples](#).

5.4. INCREMENT PREAUTHORIZATION

Increment the pre-authorization transaction amount.

5.4.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
originalTransactionId	string	ID of the original transaction that is being incremented.
incrementAmount	int	Increment amount is the amount that the transaction is being incremented by.

invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v1: URI = "paya://preauth_increment"
 ECR v2: URI = "paya://preauth_increment_v2"
 ECR v3: URI = "paya://preauth_increment_v3"
 ECR v4: URI = "app://switchiopay/api/main/v4/preauth_increment"
 ECR v5: URI = "app://switchiopay/api/main/v5/preauth_increment"
 ECR v6: URI = "app://switchiopay/api/main/v6/preauth_increment"
 ECR v7: URI = "app://switchiopay/api/main/v7/preauth_increment"
 ECR v8: URI = "app://switchiopay/api/main/v8/preauth_increment"
 ECR v9: URI = "app://switchiopay/api/main/v9/preauth_increment"
 ECR v10: URI = "app://switchiopay/api/main/v10/preauth_increment"

Parameter key = "data"
 Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://preauth_increment?data={"transactionId": "89555389-4f67-4cb0-ae8-544ea11dbd1c",
"originalTransactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "incrementAmount": 1200,
"invoiceNumber": "123456"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/preauth_increment?data={"transactionId":
"89555389-4f67-4cb0-ae8-544ea11dbd1c", "originalTransactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002", "incrementAmount": 1200, "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/preauth_increment
- parameter key: data
- parameter value: request json

5.4.2. Result

See [result structure](#) and [result examples](#).

5.5. DECREMENT PREAUTHORIZATION

Decrements the preauthorized transaction amount.

5.5.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
originalTransactionId	string	ID of the original transaction that is being decremented.
decrementAmount	int	Decrement amount is the amount that the transaction is being decremented by.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v5: URI = "app://switchiopay/api/main/v5/preauth_decrement"

ECR v6: URI = "app://switchiopay/api/main/v6/preauth_decrement"

ECR v7: URI = "app://switchiopay/api/main/v7/preauth_decrement"

ECR v8: URI = "app://switchiopay/api/main/v8/preauth_decrement"

ECR v9: URI = "app://switchiopay/api/main/v9/preauth_decrement"

ECR v10: URI = "app://switchiopay/api/main/v10/preauth_decrement"

Bundle result key = "transaction_result"

Example request for ECR v5:

```
app://switchiopay/api/main/v5/preauth_decrement?data={"transactionId":
```

```
"89555389-4f67-4cb0-ae8-544ea1dbd1c", "originalTransactionId":  
"88bb2366-716d-11ed-a1eb-0242ac120002", "decrementAmount": 1200, "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v5/
- endpoint: preauth_decrement
- parameter key: data
- parameter value: request json

5.5.2. Result

See [result structure](#) and [result examples](#).

5.6. COMPLETE PREAUTHORIZATION

To complete a pre authorization you need to provide transactionId of the corresponding successful pre-auth transaction. You also need to specify the final transaction amount. If any of the provided values are invalid or the transaction with the specified transactionId is not found in the Switchio Pay application database, the error result will be returned.

5.6.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
originalTransactionId	string	ID of the original transaction that is being completed.
finalAmount	int	Final amount is the sum of the incremental transaction and the original transaction.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v1: URI = "paya://preauth_complete"

ECR v2: URI = "paya://preauth_complete_v2"

ECR v3: URI = "paya://preauth_complete_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/preauth_complete"

ECR v5: URI = "app://switchiopay/api/main/v5/preauth_complete"

ECR v6: URI = "app://switchiopay/api/main/v6/preauth_complete"

ECR v7: URI = "app://switchiopay/api/main/v7/preauth_complete"

ECR v8: URI = "app://switchiopay/api/main/v8/preauth_complete"

ECR v9: URI = "app://switchiopay/api/main/v9/preauth_complete"

ECR v10: URI = "app://switchiopay/api/main/v10/preauth_complete"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://preauth_complete?data={"transactionId": "89555389-4f67-4cb0-ae8-544ea11dbd1c",
"originalTransactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "finalAmount": 1200,
"invoiceNumber": "123456"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/preauth_complete?data={"transactionId":
"89555389-4f67-4cb0-ae8-544ea11dbd1c", "originalTransactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002", "finalAmount": 1200, "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/preauth_complete
- parameter key: data
- parameter value: request json

5.6.2. Result

See [result structure](#) and [result examples](#).

5.7. CANCEL PREAUTHORIZATION

In order to cancel a preauth transaction, transactionId of the corresponding successful preauth transaction is needed.

5.7.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
originalTransactionId	string	ID of the original transaction that is being incremented.
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v1: URI = "paya://preauth_cancel"

ECR v2: URI = "paya://preauth_cancel_v2"

ECR v3: URI = "paya://preauth_cancel_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/preauth_cancel"
 ECR v5: URI = "app://switchiopay/api/main/v5/preauth_cancel"
 ECR v6: URI = "app://switchiopay/api/main/v6/preauth_cancel"
 ECR v7: URI = "app://switchiopay/api/main/v7/preauth_cancel"
 ECR v8: URI = "app://switchiopay/api/main/v8/preauth_cancel"
 ECR v9: URI = "app://switchiopay/api/main/v9/preauth_cancel"
 ECR v10: URI = "app://switchiopay/api/main/v10/preauth_cancel"

Parameter key = "data"
 Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://preauth_cancel?data={"transactionId": "89555389-4f67-4cb0-ae8-544ea11dbd1c",  
"originalTransactionId": "88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/preauth_cancel?data={"transactionId":  
"89555389-4f67-4cb0-ae8-544ea11dbd1c", "originalTransactionId":  
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/preauth_cancel
- parameter key: data
- parameter value: request json

5.7.2. Result

See [result structure](#) and [result examples](#).

5.8. PREAUTHORIZATION – EXTERNAL COMPLETE

Complete a preauth transaction which was opened on a different terminal. Authorization data is available on the original transaction receipt.

5.8.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
originalTransactionData	object	
terminalId	string	ID of the terminal.
authCode	string	Code of the authorization.
seqNumber	string	Number of the sequence.

finalAmount	int	Final amount is the sum of the incremental transaction and the original transaction.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v3: URI = "paya://preauth_external_complete_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/preauth_external_complete"
ECR v5: URI = "app://switchiopay/api/main/v5/preauth_external_complete"
ECR v6: URI = "app://switchiopay/api/main/v6/preauth_external_complete"
ECR v7: URI = "app://switchiopay/api/main/v7/preauth_external_complete"
ECR v8: URI = "app://switchiopay/api/main/v8/preauth_external_complete"
ECR v9: URI = "app://switchiopay/api/main/v9/preauth_external_complete"
ECR v10: URI = "app://switchiopay/api/main/v10/preauth_external_complete"

Parameter key = "data"
 Bundle result key = "transaction_result"

Example request for ECR v3:

```
paya://preauth_external_complete_v3?data={"transactionId":"3e761c9c-7ab1-4aea-9bc0-fc29546f9e77","originalTransactionData":{"terminalId":"TERMINALID","authCode":"987654","seqNumber":"123456"},"finalAmount":1200,"invoiceNumber":"123456789"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/preauth_external_complete?data={"transactionId":"3e761c9c-7ab1-4aea-9bc0-fc29546f9e77","originalTransactionData":{"terminalId":"TERMINALID","authCode":"987654","seqNumber":"123456"},"finalAmount":1200,"invoiceNumber":"123456789"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/preauth_external_complete
- parameter key: data
- parameter value: request json

5.8.2. Result

See [result structure](#) and result example for [v4](#) and [v5](#).

5.9. PREAUTHORIZATION – EXTERNAL INCREMENT

Perform an increment on a preauth transaction which was opened on a different terminal. Authorization data is available on the original transaction receipt.

Available in Switchio Pay version 4.7.0 and higher.

5.9.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
originalTransactionData	object	
terminalId	string	ID of the terminal.
authCode	string	Code of the authorization.
seqNumber	string	Number of the sequence.
incrementAmount	int	Increment amount is the amount that the transaction is being incremented by.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v7: URI = "app://switchiopay/api/main/v7/preauth_external_increment"

ECR v8: URI = "app://switchiopay/api/main/v8/preauth_external_increment"

ECR v9: URI = "app://switchiopay/api/main/v9/preauth_external_increment"

ECR v10: URI = "app://switchiopay/api/main/v10/preauth_external_increment"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v7:

```
app://switchiopay/api/main/v7/preauth_external_increment?data={"transactionId":"3e761c9c-7a
b1-4aea-9bc0-fc29546f9e77","originalTransactionData":{"terminalId":"TERMINALID","authCode":
"987654","seqNumber":"123456"},"incrementAmount":1200,"invoiceNumber":"123456789"}
```

5.9.2. Result

See [result structure](#) and [result example for v7](#).

5.10. PREAUTHORIZATION – EXTERNAL DECREMENT

Perform an decrement on a preauth transaction which was opened on a different terminal. Authorization data is available on the original transaction receipt.

Available in Switchio Pay version 4.7.0 and higher.

5.10.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
originalTransactionData	object	
terminalId	string	ID of the terminal.
authCode	string	Code of the authorization.
seqNumber	string	Number of the sequence.
decrementAmount	int	Decrement amount is the amount that the transaction is being decremented by.
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines printing policy for this operation. Possible values: DEFAULT – follows receipt printing defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines printing policy for this operation. Possible values: DEFAULT – follows receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v7: URI = "app://switchiopay/api/main/v7/preauth_external_decrement"

ECR v8: URI = "app://switchiopay/api/main/v8/preauth_external_decrement"

ECR v9: URI = "app://switchiopay/api/main/v9/preauth_external_decrement"

ECR v10: URI = "app://switchiopay/api/main/v10/preauth_external_decrement"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v7:

```
app://switchiopay/api/main/v7/preauth_external_decrement?data={"transactionId":"3e761c9c-7a
b1-4aea-9bc0-fc29546f9e77","originalTransactionData":{"terminalId":"TERMINALID","authCode":
"987654","seqNumber":"123456"},"decrementAmount":1200,"invoiceNumber":"123456789"}
```

5.10.2. Result

See [result structure](#) and [result example for v7](#).

5.11. PREAUTHORIZATION – EXTERNAL CANCEL

Cancel a preauth transaction created on a different POS.

5.11.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
originalTransactionData		
terminalId	string	ID of the terminal
authCode	string	Code of the authorization.
seqNumber	string	Number of the sequence.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v3: URI = "paya://preauth_external_cancel_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/preauth_external_cancel"

ECR v5: URI = "app://switchiopay/api/main/v5/preauth_external_cancel"

ECR v6: URI = "app://switchiopay/api/main/v6/preauth_external_cancel"

ECR v7: URI = "app://switchiopay/api/main/v7/preauth_external_cancel"

ECR v8: URI = "app://switchiopay/api/main/v8/preauth_external_cancel"

ECR v9: URI = "app://switchiopay/api/main/v9/preauth_external_cancel"

ECR v10: URI = "app://switchiopay/api/main/v10/preauth_external_cancel"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v3:

```
paya://preauth_external_cancel_v3?data={"transactionId":"b4f945cc-eee9-43ac-bd59-3f0105cf0d19",
"originalTransactionData":{"terminalId":"TERMINALID","authCode":"987654","seqNumber":"123456"}}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/preauth_external_cancel?data={"transactionId":"b4f945cc-eee9-43ac-bd59-3f0105cf0d19","originalTransactionData":{"terminalId":"TERMINALID","authCode":"987654","seqNumber":"123456"}}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/preauth_external_cancel
- parameter key: data
- parameter value: request json

5.11.2. Result

See [result structure](#) and [result examples](#).

5.12. GET TRANSACTION

Request gets a transaction from the terminal based on the transactionId.

5.12.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.

ECR v1: URI = "paya://get_transaction"

ECR v2: URI = "paya://get_transaction_v2"

ECR v3: URI = "paya://get_transaction_v3"

ECR v4: URI = "app://switchiopay/api/light/v4/get_transaction"

ECR v5: URI = "app://switchiopay/api/light/v5/get_transaction"

ECR v6: URI = "app://switchiopay/api/light/v6/get_transaction"

ECR v7: URI = "app://switchiopay/api/light/v7/get_transaction"

ECR v8: URI = "app://switchiopay/api/light/v8/get_transaction"

ECR v9: URI = "app://switchiopay/api/light/v9/get_transaction"

ECR v10: URI = "app://switchiopay/api/light/v10/get_transaction"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://get_transaction?data={"transactionId": "89555389-4f67-4cb0-ae8-544ea11dbd1c"}
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/get_transaction?data={"transactionId": "89555389-4f67-4cb0-ae8-544ea11dbd1c"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light

- path: /api/light/v4/get_transaction
- parameter key: data
- parameter value: request json

5.12.2. Result

See [result structure](#) and [result examples](#).

5.13. REVERSAL

This request performs transaction reversal. There are two options: (1) reverse transaction based on originalTransactionId (in this case, it is necessary to enter request data specified below); and (2) reverse the last transaction (this option does not require any request data).

5.13.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the reverse transaction.
originalTransactionId	string	ID of the transaction that is being reversed.
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v1: URI = "paya://reversal"

ECR v2: URI = "paya://reversal_v2"

ECR v3: URI = "paya://reversal_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/reversal"

ECR v5: URI = "app://switchiopay/api/main/v5/reversal"

ECR v6: URI = "app://switchiopay/api/main/v6/reversal"

ECR v7: URI = "app://switchiopay/api/main/v7/reversal"

ECR v8: URI = "app://switchiopay/api/main/v8/reversal"

ECR v9: URI = "app://switchiopay/api/main/v9/reversal"

ECR v10: URI = "app://switchiopay/api/main/v10/reversal"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://reversal?data={"transactionId":
"89555389-4f67-4cb0-ae8-544ea11dbd1c", "originalTransactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/reversal?data={"transactionId":
"89555389-4f67-4cb0-ae8-544ea11dbd1c", "originalTransactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/reversal
- parameter key: data
- parameter value: request json

5.13.2. Result

See [result structure](#) and [result examples](#).

5.14. MOTO

Start a MOTO transaction. The card related data is entered manually in the payment application.

5.14.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	The amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
currencyCode	int	ISO 4217 currency code.
invoiceNumber	string	OPTIONAL Number of the invoice.
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration.

PRINT - Receipt will be printed.
NO_PRINT - Receipt will not be printed.

ECR v1: URI = "paya://moto_payment"
ECR v2: URI = "paya://moto_payment_v2"
ECR v3: URI = "paya://moto_payment_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/moto_payment"
ECR v5: URI = "app://switchiopay/api/main/v5/moto_payment"
ECR v6: URI = "app://switchiopay/api/main/v6/moto_payment"
ECR v7: URI = "app://switchiopay/api/main/v7/moto_payment"
ECR v8: URI = "app://switchiopay/api/main/v8/moto_payment"
ECR v9: URI = "app://switchiopay/api/main/v9/moto_payment"
ECR v10: URI = "app://switchiopay/api/main/v10/moto_payment"

Parameter key = "data"
 Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://moto_payment?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "currencyCode": 978, "invoiceNumber": "123456"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/moto_payment?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "currencyCode": 978, "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/moto_payment
- parameter key: data
- parameter value: request json

5.14.2. Result

See [result structure](#) and [result examples](#).

5.15. MOTO PREAUTHORIZATION

Start a MOTO Preauthorization. The card related data is entered manually in the payment application.

Available in Switchio Pay version 4.7.0 and higher.

5.15.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	The amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
currencyCode	int	ISO 4217 currency code.
invoiceNumber	string	OPTIONAL Number of the invoice.
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT – follows customer receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.

ECR v7: URI = "app://switchiopay/api/main/v7/moto_preauth"

ECR v8: URI = "app://switchiopay/api/main/v8/moto_preauth"

ECR v9: URI = "app://switchiopay/api/main/v9/moto_preauth"

ECR v10: URI = "app://switchiopay/api/main/v10/moto_preauth"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v7:

```
app://switchiopay/api/main/v7/moto_preauth?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "currencyCode": 978, "invoiceNumber":
"123456" }
```

5.15.2. Result

See [result structure](#) and [result example for v7](#).

5.16. TRANSACTION STATUS

Returns status of selected transaction represented by transactionId.

5.16.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.

ECR v1: URI = "paya://transaction_status"

ECR v2: URI = "paya://transaction_status_v2"

ECR v3: URI = "paya://transaction_status_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/transaction_status"

ECR v5: URI = "app://switchiopay/api/main/v5/transaction_status"

ECR v6: URI = "app://switchiopay/api/main/v6/transaction_status"

ECR v7: URI = "app://switchiopay/api/main/v7/transaction_status"

ECR v8: URI = "app://switchiopay/api/main/v8/transaction_status"

ECR v9: URI = "app://switchiopay/api/main/v9/transaction_status"

ECR v10: URI = "app://switchiopay/api/main/v10/transaction_status"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://transaction_status?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/transaction_status?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/transaction_status
- parameter key: data
- parameter value: request json

5.16.2. Result

See [result structure](#) and [result examples](#).

5.17. REFERRAL REFUND

Authorize refund with refundId as a reference to the original transaction. Refund transaction is declined if the original transaction is not found. RefundId has to be 18 digits long.

5.17.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	The amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
currencyCode	int	ISO 4217 currency code.
refundId	string	ID of the refund.
invoiceNumber	string	OPTIONAL Number of the invoice.
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v3: URI = "paya://referral_refund_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/referral_refund"

ECR v5: URI = "app://switchiopay/api/main/v5/referral_refund"

ECR v6: URI = "app://switchiopay/api/main/v6/referral_refund"

ECR v7: URI = "app://switchiopay/api/main/v7/referral_refund"

ECR v8: URI = "app://switchiopay/api/main/v8/referral_refund"

ECR v9: URI = "app://switchiopay/api/main/v9/referral_refund"

ECR v10: URI = "app://switchiopay/api/main/v10/referral_refund"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v3:

```
paya://referral_refund_v3?data={"transactionId": "88bb2366-716d-11ed-a1eb-0242ac120002",
"amount": 1200, "currencyCode": 978, "refundId": "23456395834576345389", "invoiceNumber":
"123456"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/referral_refund?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "currencyCode": 978, "refundId":
"23456395834576345389", "invoiceNumber": "123456"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/referral_refund
- parameter key: data
- parameter value: request json

5.17.2. Result

See [result structure](#) and [result examples](#).

5.18. CASHBACK

This method allows customers to withdraw cash from a merchant during a card transaction.

NOTE: Only domestic cards can be used for the CASHBACK operation. This means that the terminal country code needs to be the same as the payment card country code. If the card country code differs from the terminal country code, the result of the transaction returns DOMESTIC_CARD_ONLY_ERROR – see [TerminalErrorCodes](#) for more detail.

5.18.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
saleAmount	int	
cashbackAmount	int	
invoiceNumber	string	OPTIONAL Number of the invoice.
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy defined from terminal configuration. PRINT – Receipt will be printed. NO_PRINT – Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL

		Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
--	--	--

ECR v1: URI = "paya://cashback"
ECR v2: URI = "paya://cashback_v2"
ECR v3: URI = "paya://cashback_v3"
ECR v4: URI = "app://switchiopay/api/main/v4/cashback"
ECR v5: URI = "app://switchiopay/api/main/v5/cashback"
ECR v6: URI = "app://switchiopay/api/main/v6/cashback"
ECR v7: URI = "app://switchiopay/api/main/v7/cashback"
ECR v8: URI = "app://switchiopay/api/main/v8/cashback"
ECR v9: URI = "app://switchiopay/api/main/v9/cashback"
ECR v10: URI = "app://switchiopay/api/main/v10/cashback"

Parameter key = "data"
 Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://cashback?data={"transactionId":"fe94a152-50db-488a-a04d-78407fed195d",
"saleAmount":14900,"cashbackAmount":5,"currencyCode":203,"daughterCompanyId":
"M1TDEMOD01", "invoiceNumber":"Invoice number"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/cashback?data={"transactionId":"fe94a152-50db-4
88a-a04d-78407fed195d", "saleAmount":14900,"cashbackAmount":5,"currencyCode":2
03,"daughterCompanyId":"M1TDEMOD01", "invoiceNumber":"Invoice number"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/cashback
- parameter key: data
- parameter value: request json

5.18.2. Result

See [result structure](#) and [result examples](#).

5.19. QR PAYMENT

Initiates a QR payment transaction. Transaction is completed by QR code scanning - see [SCANNER](#).

5.19.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
tipAmount	int	OPTIONAL Tip amount
currencyCode	int	Code of the currency. ISO 4217 currency code
invoiceNumber	string	OPTIONAL Variable symbol, max length is 20 char
daughterCompanyId	string	OPTIONAL ID of the daughter company. Required only when virtualization is enabled.
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v5: URI = "app://switchiopay/api/main/v5/qr_payment"

ECR v6: URI = "app://switchiopay/api/main/v6/qr_payment"

ECR v7: URI = "app://switchiopay/api/main/v7/qr_payment"

ECR v8: URI = "app://switchiopay/api/main/v8/qr_payment"

ECR v9: URI = "app://switchiopay/api/main/v9/qr_payment"

ECR v10: URI = "app://switchiopay/api/main/v10/qr_payment"

Bundle result key = "transaction_result"

Example request for ECR v5:

```
app://switchiopay/api/main/v5/qr_payment?data={"transactionId":
```

```
"88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "currencyCode":  
978, "invoiceNumber": "123456"}
```

5.19.2. Result

See [result structure](#) and [result examples](#).

5.20. READ CARD

Read card data and store card data in terminal database for Contactless and Magstripe transactions.

5.21. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
amount	int	Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000”; EUR 1,50 = „150” (without decimal point).
currencyCode	int	Code of the currency. ISO 4217 currency code
merchantReceiptPolicy	string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT - follows merchant receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v7: URI = "app://switchiopay/api/main/v7/read_card"

ECR v8: URI = "app://switchiopay/api/main/v8/read_card"

ECR v9: URI = "app://switchiopay/api/main/v9/read_card"

ECR v10: URI = "app://switchiopay/api/main/v10/read_card"

Bundle result key = "transaction_result"

Example request for ECR v7:

```
app://switchiopay/api/main/v7/read_card?data={"transactionId":"92751f62-17e0-46c5-a3fb-cd49ce1bc190", "amount":10000, "currencyCode":203}
```

Additional info for building uri with Uri.Builder(), available for ECR v7:

```
-scheme: app
-authority: switchiopay
-api: main
-path: /api/main/v7
-endpoint: read_card
```

5.22. Result

See [result structure](#) and [result examples](#).

5.23. READ CARD PAYMENT

Succeeding operation after read_card. Authorize transaction using previously obtained card data.

Perform a payment transaction with specified amount, currency, products, service level. Use stored card data for CLESS and Magstripe.

5.24. Request

PARAMETER		TYPE	DESCRIPTION
transactionId		string	ID of the transaction.
amount		int	Amount is the amount of the transaction in a supported currency in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
currencyCode		int	Code of the currency. ISO 4217 currency code
cardInputType		string	Possible values: • CLESS – contactless • MAGNETIC – magstripe • CONTACT – put inside terminal
serviceLevel		string	Type of sale. Possible values: • SELF_SERVE – POS is unattended • FULL_SERVE – POS is attended
productList		string array	
	code	string	Type of sold product.
	measureUnit	string	Type of measurement. Example: • LITRES • UNITS • NO_UNIT
	quantity	string	OPTIONAL Number of sold product unit.
	unitPrice	string	OPTIONAL Price per unit of measure.
	amount	string	Monetary value of purchased product. The decimal point is implied by the optional currency code. The default value is two fractional decimal digits.
	taxCode	char	Type of VAT included in the amount. Amended to alphanumeric to provide more potential codes.
	additionalProductCode	string	OPTIONAL Code identifies the product. It is optional.
merchantReceiptPolicy		string	OPTIONAL Defines merchant receipt printing policy for this operation. Possible values: DEFAULT – follows merchant receipt printing policy

		defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.
customerReceiptPolicy	string	OPTIONAL Defines customer receipt printing policy for this operation. Possible values: DEFAULT - follows customer receipt printing policy defined from terminal configuration. PRINT - Receipt will be printed. NO_PRINT - Receipt will not be printed.

ECR v7: URI = "app://switchiopay/api/main/v7/read_card_payment"

ECR v8: URI = "app://switchiopay/api/main/v8/read_card_payment"

ECR v9: URI = "app://switchiopay/api/main/v9/read_card_payment"

ECR v10: URI = "app://switchiopay/api/main/v10/read_card_payment"

Bundle result key = "transaction_result"

Example request for ECR v7:

```
app://switchiopay/api/main/v7/read_card_payment?data={"transactionId":  
"88bb2366-716d-11ed-a1eb-0242ac120002","amount": 1200,"currencyCode": 978,"cardInputType":  
"CLESS","serviceLevel": "SELF_SERVE","productList": [{"code": "123","measureUnit":  
"LITRES","quantity": "2.1","unitPrice": "0.45","amount": "1212","taxCode": "C"}, {"code":  
"34","measureUnit": "UNITS","quantity": "3.2","unitPrice": "1","amount": "32","taxCode":  
"P","additionalProductCode": "443q"}]}
```

Additional info for building uri with Uri.Builder(), available for ECR v7:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v7/
- endpoint: read_card_payment
- parameter key: data
- parameter value: request json

5.25. Result

See [result structure](#) and [result examples](#).

6. TRANSPORT ENDPOINTS

6.1. TRANSPORT INIT

Initialize transport mode and denylist. Network connection is required.

6.1.1. Request

This operation has no request data.

ECR v1: URI = "paya://init_transport"
 ECR v2: URI = "paya://init_transport_v2"
 ECR v3: URI = "paya://init_transport_v3"
 ECR v4: URI = "app://switchiopay/api/main/v4/init_transport"
 ECR v5: URI = "app://switchiopay/api/main/v5/init_transport"
 ECR v6: URI = "app://switchiopay/api/main/v6/init_transport"
 ECR v7: URI = "app://switchiopay/api/main/v7/init_transport"
 ECR v8: URI = "app://switchiopay/api/main/v8/init_transport"
 ECR v9: URI = "app://switchiopay/api/main/v9/init_transport"
 ECR v10: URI = "app://switchiopay/api/main/v10/init_transport"

Bundle result key = "result"

Example request for ECR v1:

```
paya://init_transport
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/init_transport
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/init_transport
- parameter value: request json

6.1.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
resultCode	int	0 - Success 1 - Internal error 2 - Download error
message	string	Result message.

Result example:

```
{
    "resultCode": 0,
    "message": "Success"
}
```

6.2. TRANSPORT PAYMENT

Requesting transport payment data from Switchio Pay.

6.2.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	Unique ID of the transaction.
transportAmount	int	OPTIONAL, available from v4.5.0 Transaction amount shown on the terminal/validator display when the card is tapped. The amount is sent in the minimum currency unit. For example, if the currency is Kč 10,00, amount = „1000“; EUR 1,50 = „150“ (without decimal point).
transportCurrencyCode	int	OPTIONAL, available from v4.5.0 Currency code visualized on the terminal/validator display when the card is tapped.
processingMode	string	OPTIONAL, available from v4.7.0; values: Aggregated / KFT. Just resend it to Transport server
InvoiceNumber	string	Variable symbol, max length is 20 char
virtualTerminalId	string	OPTIONAL, available from v4.7.0 daughterCompanyId, required only when virtualisation is enabled
transportData	string	base64 encoded string data from validator

ECR v1: URI = "paya://payment_transport"

ECR v2: URI = "paya://payment_transport_v2"

ECR v3: URI = "paya://payment_transport_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/payment_transport"

ECR v5: URI = "app://switchiopay/api/main/v5/payment_transport"

ECR v6: URI = "app://switchiopay/api/main/v6/payment_transport"

ECR v7: URI = "app://switchiopay/api/main/v7/payment_transport"

ECR v8: URI = "app://switchiopay/api/main/v8/payment_transport"

ECR v9: URI = "app://switchiopay/api/main/v9/payment_transport"

ECR v10: URI = "app://switchiopay/api/main/v10/payment_transport"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v1:

```
paya://payment_transport?data={"transactionId":"3ffed32e-6243-430e-905b-f0c5552feeff",
"invoiceNumber":"1234", "transportData":"data"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/payment_transport?data={"transactionId":"3ffed32e-6243-430e-905b-f0c5552feeff", "transportAmount":10053, "transportCurrencyCode":203,
"invoiceNumber":"1234", "transportData":"data"}
```

Example request for ECR v7:

```
app://switchiopay/api/main/v7/payment_transport?data={"transactionId":"3ffed32e-6243-430e-905b-f0c5552feeff", "transportAmount":10053, "transportCurrencyCode":203, "processingMode":KFT, "invoiceNumber":"1234", "virtualTerminalId":"M1TDEMOD01", "transportData":"data"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/payment_transport
- parameter key: data
- parameter value: request json

6.2.2. Result

Result structure:

PARAMETER		TYPE	DESCRIPTION
processingResultCode		int	Operation result code
message		string	String describing cause of the failure
fareTransactionRequest		fareTransactionRequest	OPTIONAL fareTransactionRequest object
	device	device	device object
	type	string	EMV reader brand
	reader_id	string	Card reader ID
	virtual_reader_id	string	Virtual reader ID if virtualization is enabled and is in request
	reader_sn	string	Card reader serial number
	deny_list_version	string	Current version of the deny list
	transaction	transaction	transaction object
	token	string	Encrypted combination of data
	id	string	Transaction ID
	dtm	string	Date and time of the transaction
	result	string	Token deny list result
	masked_pan	string	Masked PAN of the card
	fare_data	string	base64 encoded string data from validator
	emv_data	emv_data	emv_data object
	tags	array	
	encrypted	encrypted	encrypted object
	encryption_method	string	Method used for encryption
	encrypted_data	string	Encrypted data

Result example:

```
{
  "processingResultCode": 0,
  "message": "ok",
  "fareTransactionRequest": {
    "device": {
      "type": "NEXGO",
      "reader_id": "THOSKBB999",
      "reader_sn": "N600W102315",
      "deny_list_version": "D002592310120002"
    },
    "transaction": {
      "token": "119D45E2D7E32E1AE676CF7B196F790B7F4C3FD69C026427C9C4A9AC3B006C1E50",
      "id": "5e9c5819-0ad3-494a-a61d-acf7b632d1ad",
      "dtm": "2023-10-12T12:28:53Z",
      "result": "NO_DENYLIST",
      "masked_pan": "541333*****4111"
    },
    "fare_data": "eyJCdXMiOjF9",
    "emv_data": {
      "tags": [
        {
          "key": "9F24",
          "value": "353030314142434445464748494A4B4C4D4E4F50515253545556575859"
        },
        {
          "key": "9F06",
          "value": "A0000000041010"
        },
        {
          "key": "5F24",
          "value": "2512"
        }
      ],
      "encrypted": {
        "encryption_method": "MNSP",
        "encrypted_data":
"00787F637B727209096D54AC173A2DE33A098C2001BB67DE20605FB79528E5AAFB12DA2FD535C08E40AA8CBF25
682226FA63228FD6A5F37A98BF26F5193405E748433336E09A132B07AC39D9911740A741C936CDF63201499BA30
E7A0F1098E2F9778D59B9949988259FB231CFE6DBD75B528FD0EA9A9E4EB8B76D2620E4F7AA4F6DCEF5C07188F5
30525559F2D62BCA08053A36B49DD22432131AF3275F4B30F6800744D94344BBDCB7ED8021E7FDC8FC655CE7AAD
E7D9F2F34226459DEA6B00FA3BC4D9E1ADAF851053BF94825257C11B79BC749EBD00A9674614C8392CEFE3FD910
8C91E7F87025147F979BAAB23B0B4D1D47A083D20A67BFFDC3D42B89648EED81B0625CAA90873063DD0EFC311F2
B03E1EAE447F796969C02C8C9A62BE5A8F53688F4F76FA3AC531BBB13EF5575F623969041870EF07E6F9164A4AC
440979CCDF1C1FEA76A434D344318A47AADFAB26B27FA358400FB4C7CE75D20359FF672BAF035C7645F87FE3519
FAD008914840E3465737AAD4DAAD1"
      }
    }
  }
}
```

6.3. TRANSPORT REFUND

Requesting transport refund data from Switchio Pay. Available from v4.7.0.

6.3.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.
transportAmount	int	Amount of transaction
transportCurrency Code	int	Currency code
InvoiceNumber	string	Optional, Id of transaction that is being reversed.
transportData	string	Optional, Base64 encoded string data from validator
additionalText	string	Optional, Option to use for customer email address
virtualTerminalId	string	Optional, daughterCompanyId, required only when virtualisation is enabled

ECR v7: URI = "app://switchiopay/api/main/v7/refund_transport"

ECR v8: URI = "app://switchiopay/api/main/v8/refund_transport"

ECR v9: URI = "app://switchiopay/api/main/v9/refund_transport"

ECR v10: URI = "app://switchiopay/api/main/v10/refund_transport"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v7:

```
app://switchiopay/api/main/v7/refund_transport?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002", "amount": 1200, "currencyCode": 978, "invoiceNumber":
"123456", "additionalText": "customer@gmail.com", "virtualTerminalId": "M1TDEM01",
"transportData": "q100-12_123"}
```

Additional info for building uri with Uri.Builder(), available for ECR v7:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v7/refund_transport
- parameter key: data
- parameter value: request json

6.3.2. Result

Result structure:

PARAMETER		TYPE	DESCRIPTION
processingResultCode		int	Operation result code
message		string	String describing cause of the failure
fareTransactionRequest		fareTransactionRequest	OPTIONAL fareTransactionRequest object
	device	device	device object
	type	string	Type of the device
	validator_id	string	Logical id of the validator
	validator_sn	string	Validator serial number
	reader_id	string	EMV reader logical ID
	reader_sn	string	EMV reader serial number
	virtual_reader_id	string	ID of the virtual reader, optional
	deny_list_version	string	Version of deny list in the device in the moment of transaction
	transaction	transaction	transaction object
	token	string	Encrypted combination of data
	masked_pan	string	Masked PAN value in format 6+4 (optional)
	id	string	Transaction ID on the device
	dtm	string	Date and time of the transaction, preferred ISO 8601 format, time zone is local time zone of the device
	result	string	Transaction result = OK, FAIL, DENYLIST etc...
	mode	string	Processing mode, optional, defaults to MTT, possible values MTT/KFT
	detail_result	string	Detail result = response code from transaction processing or some processing details
	fare_data	string	BASE64 encoded string data from validator. Data holding information about the trip, zones, amount - project specific
	emv_data	emv_data	List of clear EMV tags - project specific
	tags	array	
	key	string	
	value	string	
	encrypted	encrypted	List of encrypted EMV tags - project specific

	encryption_method	string	Method used for encryption (DUKPT)
	encryption_seed	string	Data needed for key derivation
	encrypted_data	string	Encrypted sensitive EMV data

Result example:

```
{
  "processingResultCode": 0,
  "message": "ok",
  "fareTransactionRequest": {
    "device": {
      "type": <string>,
      // type of the device
      "validator_id": <string>,
      // logical id of the validator
      "validator_sn": <string>,
      // validator serial number
      "reader_id": <string>,
      // emv reader logical id
      "reader_sn": <string>,
      // emv reader serial number
      "virtual_reader_id": <string>,
      // id of the virtual reader, optional
      "deny_list_version": <string>
      // version of deny list in the device in the moment of transaction
    },
    "transaction": {
      "token": <string>,
      // card token calculated by the device
      "masked_pan": <string>,
      // masked pan value in format 6+4 (optional)
      "id": <string>,
      // transaction id on the device
      "dtm": <string>,
      // date and time of the transaction, preferred ISO 8601 format,
      // time zone is local time zone of the device
      "result": <string>,
      // transaction result = OK, FAIL, DENYLIST etc...
      "mode": <string>,
      // processing mode, optional, defaults to MTT, possible values MTT/KFT
      "detail_result": <string>
      // detail result = response code from transaction processing
      // or some processing details
    },
    "fare_data": <string>,
    // data holding information about the trip, zones, amount - project specific
    // BASE64 encoded binary TLV structure

    // list of clear emv tags - project specific
    "emv_data": {
      "tags": [
        {
          "key": <string>,
          "value": <string>
        }
      ]
    }
  }
}
```

```
    ],  
    //list of encrypted emv tags - project specific  
    "encrypted":{  
        "encryption_method": <string>,  
        // DUKPT  
        "encryption_seed": <string>,  
        // data needed for key derivation  
        "encrypted_data": <string>  
        // encrypted sensitive emv data  
    }  
}  
}
```

6.4. TRANSPORT REVERSAL

This request performs transaction reversal. Reverse transaction based on originalTransactionId (it is necessary to enter request data specified below).

6.4.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the reverse transaction.
originalTransactionId	string	ID of the transaction that is being reversed.
additionalText	string	Optional, Option to use for customer email address
virtualTerminalId	string	Optional, daughterCompanyId, required only when virtualisation is enabled

ECR v7: URI = "app://switchiopay/api/main/v7/reversal_transport"

ECR v8: URI = "app://switchiopay/api/main/v8/reversal_transport"

ECR v9: URI = "app://switchiopay/api/main/v9/reversal_transport"

ECR v10: URI = "app://switchiopay/api/main/v10/reversal_transport"

Parameter key = "data"

Bundle result key = "transaction_result"

Example request for ECR v7:

```
app://switchiopay/api/main/v7/reversal_transport?data={"transactionId":
"89555389-4f67-4cb0-ae8-544ea11dbd1c", "originalTransactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002", "additionalText": "customer@gmail.com",
"virtualTerminalId": "M1TDEM01"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v7/reversal_transport
- parameter key: data
- parameter value: request json

6.4.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
resultCode	int	Operation result code, enums: • CODE_SUCCESS = 0 • CODE_INVALID_REQUEST = 1
message	string	String describing cause of the failure

Result example:

```
{
```

```
"resultCode": 0,
"message": "ok",
}
```

6.5. CUSTOMER TAP

This gets information about a tap based on the transaction ID.

6.5.1. Request

PARAMETER	TYPE	DESCRIPTION
transactionId	string	ID of the transaction.

ECR v1: URI = "paya://customer_tap"

ECR v2: URI = "paya://customer_tap_v2"

ECR v3: URI = "paya://customer_tap_v3"

ECR v4: URI = "app://switchiopay/api/main/v4/customer_tap"

ECR v5: URI = "app://switchiopay/api/main/v5/customer_tap"

ECR v6: URI = "app://switchiopay/api/main/v6/customer_tap"

ECR v7: URI = "app://switchiopay/api/main/v7/customer_tap"

ECR v8: URI = "app://switchiopay/api/main/v8/customer_tap"

ECR v9: URI = "app://switchiopay/api/main/v9/customer_tap"

ECR v10: URI = "app://switchiopay/api/main/v10/customer_tap"

Parameter key = "data"

Bundle result key = "data"

Example request for ECR v1:

```
paya://customer_tap?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Example request for ECR v4:

```
app://switchiopay/api/main/v4/customer_tap?data={"transactionId":
"88bb2366-716d-11ed-a1eb-0242ac120002"}
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: main
- path: /api/main/v4/customer_tap
- parameter key: data
- parameter value: request json

6.5.2. Result

Result structure:

PARAMETER		TYPE	DESCRIPTION
processingResultCode		int	0 - Success 3 - Card read error 4 - Encryption error 5 - Timeout 8 - Internal error
message		string	Result message.
response		object	Response object with the result.
	result	string	Possible values: - OK - FAIL
	resultMessage	string	OPTIONAL String describing the cause of the failure.
	code	string	Response code from terminal; see TerminalErrorCodes table.

Result example:

```
{
  "processingResultCode": 0,
  "message": "OK",
  "response": {
    "result": "OK",
    "resultMessage": "result message",
    "code": "code"
  }
}
```

6.6. UPLOAD TRANSPORT TRANSACTIONS

The Terminal periodically uploads transactions. This API allows the cash register to force upload all stored transactions in the terminal.

6.6.1. Request

This operation has no request data. Result of the upload operation is broadcasted.

ECR v1: URI = "paya://upload_transport_transactions"
 ECR v2: URI = "paya://upload_transport_transactions_v2"
 ECR v3: URI = "paya://upload_transport_transactions_v3"
 ECR v4: URI = "app://switchiopay/api/light/v4/upload_transport_transactions"
 ECR v5: URI = "app://switchiopay/api/light/v5/upload_transport_transactions"
 ECR v6: URI = "app://switchiopay/api/light/v6/upload_transport_transactions"
 ECR v7: URI = "app://switchiopay/api/light/v7/upload_transport_transactions"
 ECR v8: URI = "app://switchiopay/api/light/v8/upload_transport_transactions"
 ECR v9: URI = "app://switchiopay/api/light/v9/upload_transport_transactions"
 ECR v10: URI = "app://switchiopay/api/light/v10/upload_transport_transactions"

Bundle result key = "result"

Example request for ECR v1:

```
paya://upload_transport_transactions
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/upload_transport_transactions
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v4/upload_transport_transactions
- parameter value: request json

6.6.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
resultCode	int	0 - Success 1 - Upload error 2 - Configuration error 4 - No transaction found
message	string	Result message.

Result broadcast action:

```
switchiopay.transport.upload
```

Broadcast action = "paya.tmsparam.status"

Broadcast bundle key = "tmsParamStatus"

Result example:

```
{
  "resultCode": 4
  "message": "no transactions found"
}
```

6.7. CUSTOMER TAP SERVICE START

This endpoint starts a service in the background that makes it possible to open a client's application that receives data with information about the taps made.

6.7.1. Request

ECR v1: URI = "paya://customer_tap_service_start"
ECR v2: URI = "paya://customer_tap_service_start_v2"
ECR v3: URI = "paya://customer_tap_service_start_v3"
ECR v4: URI = "app://switchiopay/api/light/v4/customer_tap_service_start"
ECR v5: URI = "app://switchiopay/api/light/v5/customer_tap_service_start"
ECR v6: URI = "app://switchiopay/api/light/v6/customer_tap_service_start"
ECR v7: URI = "app://switchiopay/api/light/v7/customer_tap_service_start"
ECR v8: URI = "app://switchiopay/api/light/v8/customer_tap_service_start"
ECR v9: URI = "app://switchiopay/api/light/v9/customer_tap_service_start"
ECR v10: URI = "app://switchiopay/api/light/v10/customer_tap_service_start"

Bundle result key = "data"

Example request for ECR v1:

```
paya://customer_tap_service_start
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/customer_tap_service_start
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v4/customer_tap_service_start
- parameter value: request json

6.7.2. Result

See [Result structure](#).

Result broadcast action:


```
switchio.pay.customertap
```

Broadcast action = "switchio.pay.customertap"

Broadcast bundle key = "data"

Result example:

```
{
  "resultCode": 4,
  "message": "no transactions found"
}
```



6.8. CUSTOMER TAP SERVICE STOP

Stop the customer tap service and the client's application ceases to receive information about card taps.

6.8.1. Request

ECR v1: URI = "paya://customer_tap_service_stop"
ECR v2: URI = "paya://customer_tap_service_stop_v2"
ECR v3: URI = "paya://customer_tap_service_stop_v3"
ECR v4: URI = "app://switchiopay/api/light/v4/customer_tap_service_stop"
ECR v5: URI = "app://switchiopay/api/light/v5/customer_tap_service_stop"
ECR v6: URI = "app://switchiopay/api/light/v6/customer_tap_service_stop"
ECR v7: URI = "app://switchiopay/api/light/v7/customer_tap_service_stop"
ECR v8: URI = "app://switchiopay/api/light/v8/customer_tap_service_stop"
ECR v9: URI = "app://switchiopay/api/light/v9/customer_tap_service_stop"
ECR v10: URI = "app://switchiopay/api/light/v10/customer_tap_service_stop"

Example request for ECR v1:

```
paya://customer_tap_service_stop
```

Example request for ECR v4:

```
app://switchiopay/api/light/v4/customer_tap_service_stop
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v4/customer_tap_service_stop
- parameter value: request json

6.8.2. Result

As a result of this request, the customer tap service stops and the customer's application does not receive data about taps any more.

6.9. GET TAPS

Gets information about card taps that were not sent to the server.

6.9.1. Request

This operation has no request data. Result of the get taps operation is broadcasted. If there are no available taps, the result list will be empty.

ECR v5: URI = "app://switchiopay/api/light/v5/get_taps"

ECR v6: URI = "app://switchiopay/api/light/v6/get_taps"

ECR v7: URI = "app://switchiopay/api/light/v7/get_taps"

ECR v8: URI = "app://switchiopay/api/light/v8/get_taps"

ECR v9: URI = "app://switchiopay/api/light/v9/get_taps"

ECR v10: URI = "app://switchiopay/api/light/v10/get_taps"

Bundle result key = "get_taps"

Example request for ECR v5:

```
app://switchiopay/api/light/v5/get_taps
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v5/get_taps
- parameter value: request json

6.9.2. Result

Result structure:

PARAMETER	TYPE	DESCRIPTION
token	string	Card token
id	string	ID of the tap
dtm	string	Date and time of the tap
result	string	Possible values: • OK • FAIL • EXPIRED • DENYLISTED • NOTIFY_DENYLIST • NO_DENYLIST
detail_result	string	OPTIONAL
masked_pan	string	OPTIONAL Partially hidden PAN

Result example:

```
[
  {
    "token": "token12345",
```

```
[
  {
    "id": "7d1c083d-19f3-4d7b-aa14-f615ed500a85",
    "dtm": "2023-09-05T08:49:55Z",
    "result": "OK",
    "detail_result": "result",
    "masked_pan": "1234****1234"
  }
]
```

6.10. GET DENYLIST UPDATE

Method for getting the date of last denylist update. Date is in format "yyyy-MM-dd HH:mm:ss".

6.10.1. Request

This operation has no request data. Result of the get taps is broadcasted, if there are no available taps the result list will be empty.

ECR v5: URI = "app://switchiopay/api/light/v5/get_denylist_last_update"

ECR v6: URI = "app://switchiopay/api/light/v6/get_denylist_last_update"

ECR v7: URI = "app://switchiopay/api/light/v7/get_denylist_last_update"

ECR v8: URI = "app://switchiopay/api/light/v8/get_denylist_last_update"

ECR v9: URI = "app://switchiopay/api/light/v9/get_denylist_last_update"

ECR v10: URI = "app://switchiopay/api/light/v10/get_denylist_last_update"

Bundle result key = "get_denylist_last_update"

Example request for ECR v5:

```
app://switchiopay/api/light/v5/get_denylist_last_update
```

Additional info for building uri with Uri.Builder(), available for ECR v4, v5:

- scheme: app
- authority: switchiopay
- api: light
- path: /api/light/v5/get_denylist_last_update
- parameter value: request json

6.10.2. Result

Result structure:

```
<string>
```

Result example:

```
"2023-09_06 10:01:02"
```

7. APPLICATION DESCRIPTION


Certified app for Android terminal for EMV card payment. It supports two modes, standalone and external cash register mode.

The payment application primarily serves to complete operations triggered by third party cash registers using the ECR protocol.

The external cash register mode is blocked from invoking payment functions directly from the payment application. Instead, it uses the ECR protocol, and payment operations are triggered by a third-party cash register with the given parameters. After completion of the operation, the result or data related to the result of the transaction are returned to the cash register. When you start the application from the system menu of the application, the Dashboard is displayed, ie a menu with basic functions such as shutter and settings.

Standalone mode supports all terminal payment operations without the need for a third party cash register. The start screen in this mode is payment.

7.1. Payment

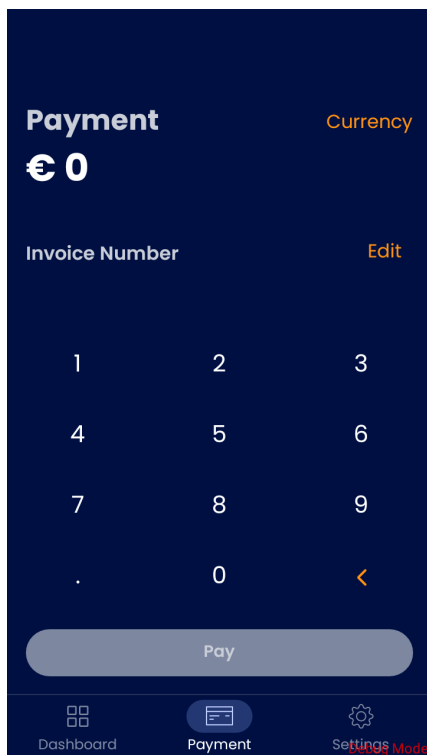

The operator can make a payment by entering the amount or variable symbol. When entering the variable symbol, the system keyboard is displayed, the numeric keyboard is displayed after clicking on the displayed amount. After ECR protocol supports running of the token generator in the background. Application has control of turning on and off the card detection and a token generation via the ECR protocol. Once the token generator is turned on, the token will be broadcasted from the payment application. The Client application is able to receive the token by implementing the BroadcastReceiver. After the response from the payment application, start the generator again to generate another token.

Make sure you stop the token generator as well as unregister the broadcast receiver after you are done to prevent excessive battery usage and memory leaks.


By filling in the necessary data and pressing the "Pay" button, you will be prompted to apply your credit card and the standard payment process will take place.

The button in the upper left corner gives the operator access to the dashboard, where he has settings, closing date and all other terminal functions.

7.2. Refund


The operation flow of the refund transaction is basically the same as for standard payment.

7.3. Dashboard

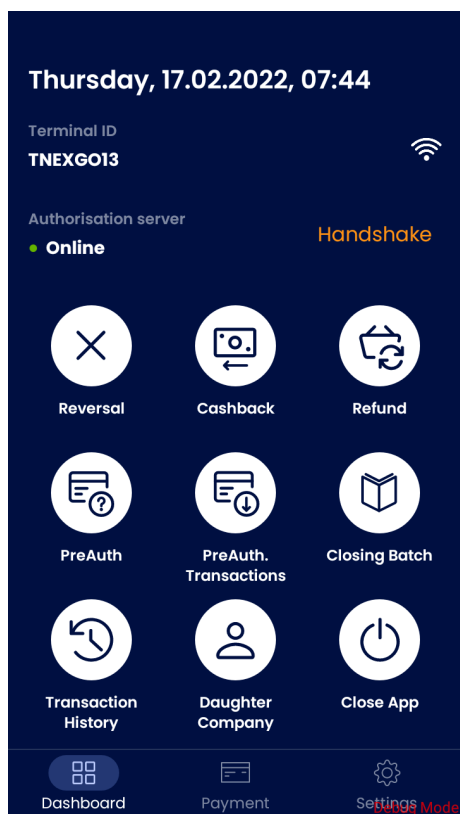

The dashboard has the function of the main application menu. Displays basic terminal status, wifi signal, battery status, server status, date and time. It also contains links to settings, the closing date and other terminal functions, depending on the mode and configuration of the application. The dashboard is also where you can exit the app by pressing the button in the top right corner.


7.4. The closing batch

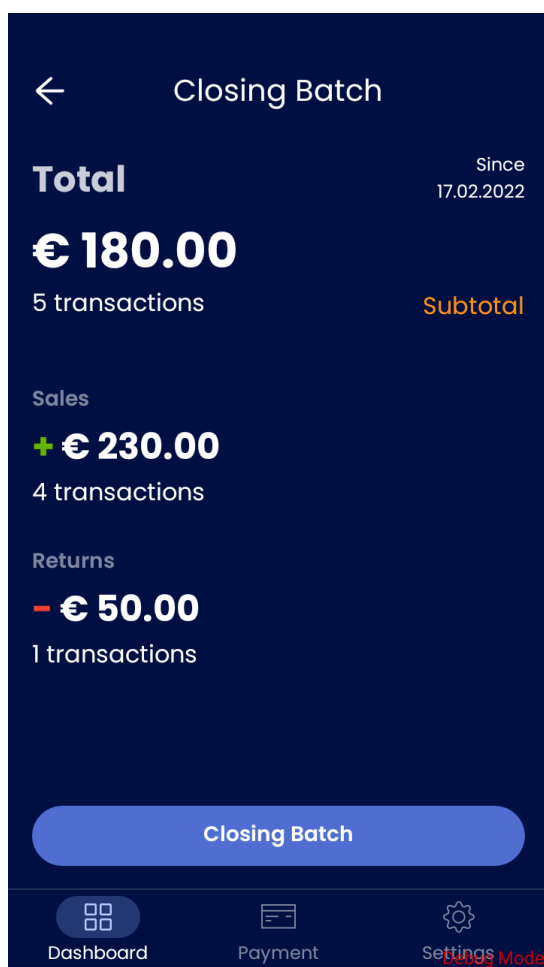

The closing batch function allows the operator to view the current subtotal, print a block with a subtotal, and also create the closing batch itself.

In the closing batch screen, each color represents a different type of transaction amounts / counts. Green stands for payments, red for refunds and blue represents total amounts and counts.

7.5. Settings

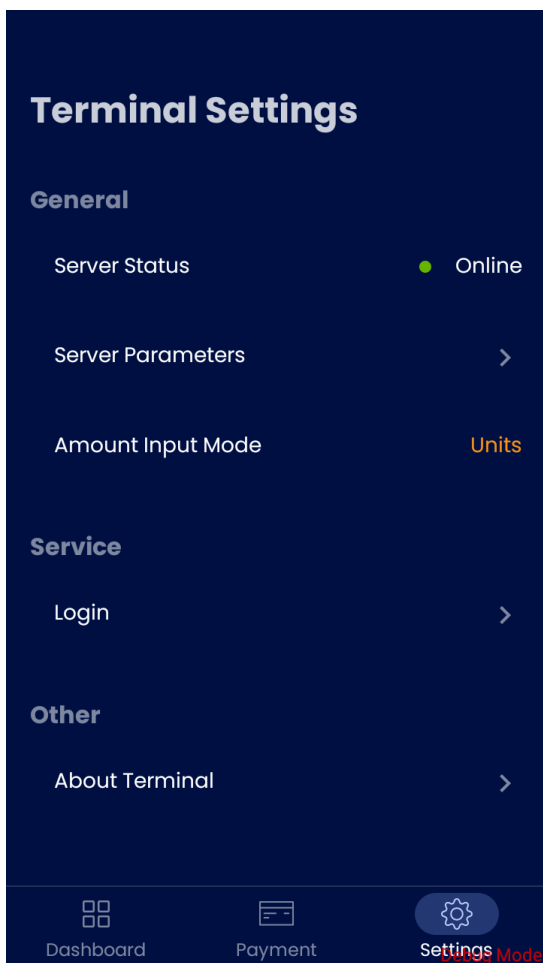


The terminal settings include tools for downloading parameters from the server, editing them, a service menu for testing all terminal functions without the need for an intermediate application protocol, loading keys to the terminal, and more.

The Server Parameters menu contains settings for downloading parameters. They can be edited by a service technician in the Service menu. The default service PIN is set to 99999999.

After logging into the service technician, all terminal functions are made available in the Dashboard menu.


Tapping Server Status runs the handshake process resulting in one of Online, Offline or Unknown status.

7.6. Service Settings

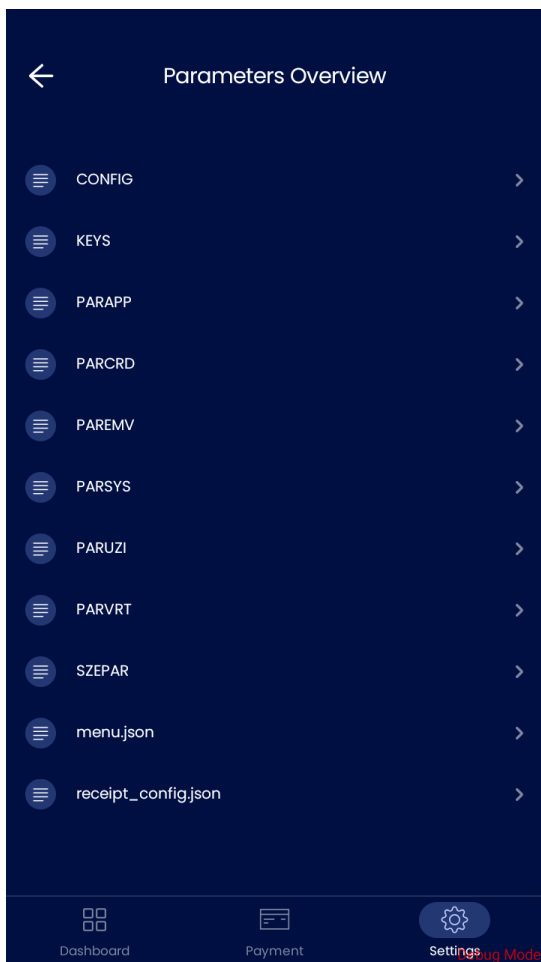


The service settings offer tools to setup or change configuration files by authorized technicians.

Parameters menu allows the technician to edit terminal parameters locally.

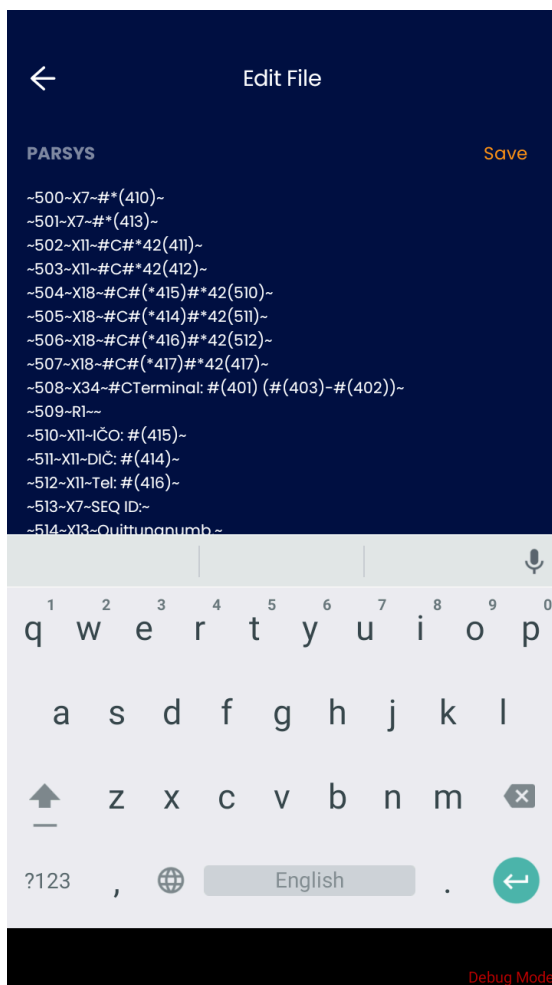

7.6.1. Key injection

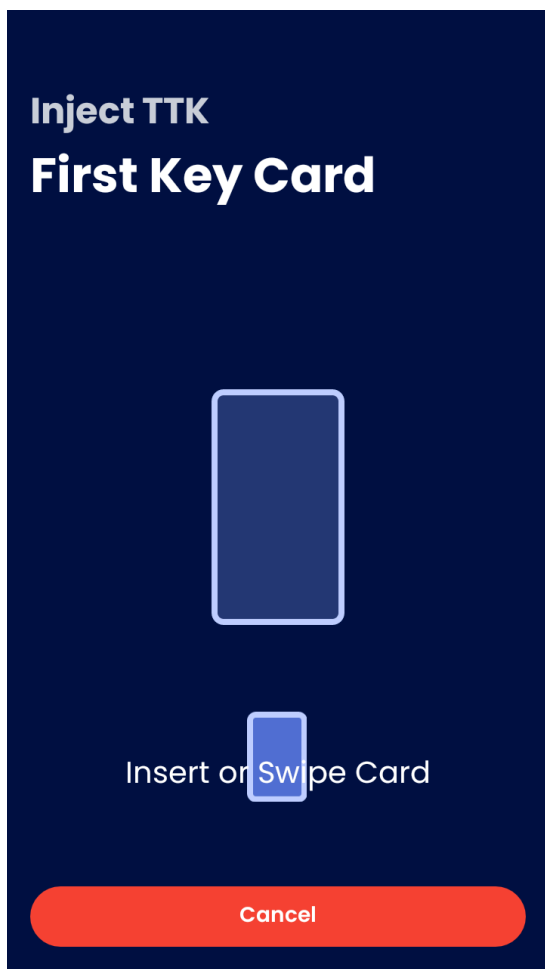

The service menu contains the wizard to inject terminal keys using two TTK cards. The wizard takes the technician through the complete key injection setup.



The service menu also allows the technician to view the KCVs of the injected keys as well as their positions.

ATTACHMENT – ENUMS

TerminalErrorCodes

ResultCode			
ID	Response Code	Description (Response Message)	Result
0	OK	All processing is successful	✓
1	KERNEL_FAILED	Initialization of kernel failed	X
2	KERNEL_NOT_ACCESS	Kernel isn't accessible	X
3	TEXT_KERNEL_NOT_INIT	Kernel not initialized	X
4	BLUETOOTH_NOT_SUPPORTED	Bluetooth not supported	X
5	PINBLOCK_TIMEOUT	Timeout for read pinblock	X
6	PINBLOCK_USER_CANCELLED	User cancel a pinblock	X
7	CANCELLED	Default user cancel	X
8	FAILED	Default failure	X
9	NO_PAPER	No paper available	X
10	UNKNOWN_MERCHANT	Unknown merchant	X
11	UNKNOWN	Transaction has not been completed	X
501	SCA_PIN_REQUIRED	Passcode and biometric capable. It is not possible to insert a contact card, it is just contactless.	X
1000	SPDH_DEFINE		-
1050	DeclinedGeneral	General decline.	X
1050	DeclinedProductGroup	Product group not allowed.	X
1050	DeclinedCardBlocked	The card is blocked.	X
1050	DeclinedCardBlockedByRange	The card is blocked by range.	X
1050	DeclinedAccountNotAllowedOnStation	The use of an account card is not allowed on the given gas station.	X
1050	DeclinedProductGroupForStation	Product group not allowed for the given gas station.	X
1050	DeclinedCardDailyTxCountLimitExceeded	The card has exceeded the daily maximum number of transactions.	X
1050	DeclinedCardWeeklyTxCountLimitExceeded	The card has exceeded the weekly maximum number of transactions.	X

1050	DeclinedCardMonthlyTxCountLimitExceed	The card has exceeded the monthly maximum number of transactions.	X
1050	DeclinedCardDailyFuelLimitExceed	The card has exceeded the daily fuel limit.	X
1050	DeclinedCardWeeklyFuelLimitExceed	The card has exceeded the weekly fuel limit.	X
1050	DeclinedCardMonthlyFuelLimitExceeded	The card has exceeded the monthly fuel limit.	X
1050	DeclinedCardDailyMoneyLimitExceeded	The card has exceeded the daily money limit.	X
1050	DeclinedCardWeeklyMoneyLimitExceeded	The card has exceeded the weekly money limit.	X
1050	DeclinedCardMonthlyMoneyLimitExceeded	The card has exceeded its monthly cash limit.	X
1050	DeclinedCardTxPriceLimitExceed	The card has exceeded the maximum cash limit per transaction.	X
1050	DeclinedCardDailyOtherLimitExceed	The card has exceeded the daily money limit on dry goods.	X
1050	DeclinedCardWeeklyOtherLimitExceeded	The card has exceeded the weekly money limit on dry goods.	X
1050	DeclinedCardMonthlyOtherLimitExceeded	The card has exceeded the monthly money limit on dry goods.	X
1050	DeclinedCardTxFuelAmountLimitExceeded	The card has exceeded the maximum amount of fuel per transaction.	X
1050	DeclinedCardTxOtherPriceLimitExceeded	The card has exceeded the maximum price limit for dry goods per transaction.	X
1051	DeclinedExpiredCard	Expired card.	X
1052	DeclinedNumberOfPINAttemptsExceeded	Number of PIN tries exceeded.	X
1053	DeclinedNoSharingAllowed	No sharing allowed.	X
1054	DeclinedNoSecurityModule	No security module.	X
1055	DeclinedInvalidTransaction	Invalid transaction.	X
1056	DeclinedNotSupportedByInstitution	Transaction not supported by institution.	X
1057	DeclinedLostOrStolenCard	Lost or stolen card.	X
1058	DeclinedInvalidCardStatus	Invalid card status.	X
1059	DeclinedRestrictedStatus	Restricted status.	X
1060	DeclinedAccountNotFoundInCardholder	Account not found in cardholder	X

	derDatabase	database.	
1061	DeclinedPositiveBalanceAccountRecordNotFound	Positive balance account record not found.	X
1061	DeclinedPositiveBalanceAccountRecordNotFound	Positive balance account update error.	X
1063	DeclinedInvalidAuthorizationTypeInInstitutionDatabase	Invalid authorization type in institution database.	X
1064	DeclinedBadTrackInformation	Bad track information.	X
1065	DeclinedAdjustmentNotAllowedInInstitutionDatabase	Adjustment not allowed in the institution database.	X
1066	DeclinedInvalidCreditCardAdvanceIncrement	Invalid credit card advance increment.	X
1067	DeclinedInvalidTransactionDate	Invalid transaction date.	X
1068	DeclinedTransactionLogFileError	Transaction log file error.	X
1069	DeclinedBadMessageEdit	Bad message edit.	X
1070	DeclinedNoInstitutionDatabaseRecord	No institution database record.	X
1071	DeclinedInvalidRoutingToHostApplication	Invalid routing to host application.	X
1072	DeclinedCardOnNationalNegativeFile	Card on national negative file.	X
1073	DeclinedInvalidRoutingAuthorizationService	Invalid routing authorization service.	X
1074	DeclinedUnableToAuthorize	Unable to authorize.	X
1074	DeclinedUnableToAuthorizeRepeat	Unable to authorize, retry transaction.	X
1075	DeclinedInvalidPANLength	Invalid PAN length.	X
1076	DeclinedInsufficientFundsInPositiveBalanceAccount	Insufficient funds in a positive balance account.	X
1077	DeclinedPreauthorizationFull	Preauthorization full.	X
1078	DeclinedDuplicateTransactionReceived	Duplicate transaction received.	X
1079	DeclinedMaximumOnlineRefundReached	Maximum online refund reached.	X
1080	DeclinedMaximumOfflineRefundReached	Maximum offline refund reached.	X
1081	DeclinedMaximumCreditPerRefundReached	Maximum credit per refund reached.	X
1082	DeclinedMaximumNumberOfTimesUsed	Maximum number of times used.	X

1083	DeclinedMaximumRefundCreditReached	Maximum refund credit reached.	X
1084	DeclinedCustomerSelectedNegativeCardFileReason	Customer selected negative card file reason.	X
1085	DeclinedInquiryNotAllowedNoBalances	Inquiry not allowed—no balances.	X
1086	DeclinedOverFloorLimit	Over floor limit.	X
1087	DeclinedMaximumNumberRefundCreditsReached	Maximum number refund credits reached.	X
1088	DeclinedPlaceCall	Place call.	X
1089	DeclinedCardStatusIsInactiveOrClosed	Card status equals 0 (inactive) or 9 (closed).	X
1090	DeclinedReferralFileFull	Referral file full.	X
1091	DeclinedProblemAccessingNegativeCardFile	Problem accessing negative card file.	X
1092	DeclinedAdvanceLessThanMinimum	Advance less than minimum.	X
1093	DeclinedDelinquent	Delinquent.	X
1094	DeclinedOverLimitTableOrExceedsAmountAvailable	Over limit table or exceeds the amount available.	X
1095	DeclinedAmountOverMaximum	Amount over maximum.	X
1096	DeclinedPINRequired	PIN required.	X
1097	DeclinedMod10Check	Mod 10 check.	X
1098	DeclinedForcePost	Force post.	X
1099	DeclinedCouldNotAccessPositiveBalanceAccountInDatabase	Could not access positive balance account in database	X
1100	ReferralUnableToProcessTransaction	Unable to process a transaction.	X
1101	ReferralUnableToAuthorizeIssueCall	Unable to authorize—issue call.	X
1102	ReferralCall	Call.	X
1103	ReferralProblemAccessingNegativeCardFile	Problem accessing negative card file.	X
1104	ReferralProblemAccessingCardholderAccount	Problem accessing cardholder account.	X
1105	ReferralCardNotSupported	Card not supported.	X
1105	ReferralCardNotFound	Card not found.	X
1105	ReferralCardReplenishmentSupported	Card replenishment not supported.	X
1106	ReferralAmountOverMaximum	Amount over maximum.	X

1107	ReferralOverDailyLimit	Over daily limit.	X
1108	ReferralCardAuthorizationParametersNotFound	Card authorization parameters not found.	X
1109	ReferralAdvanceLessThanMinimum	Advance less than minimum.	X
1110	ReferralNumberTimesUsed	Number times used.	X
1111	ReferralDelinquent	Delinquent.	X
1112	ReferralOverLimitTable	Over limit table	X
1113	ReferralTimeout	Timeout.	X
1115	ReferralTransactionLogFileFull	Transaction log file full.	X
1120	ReferralProblemAccessingCardholderUsageAccumulationData	Problem accessing cardholder usage accumulation data.	X
1121	ProblemAccessingAdministrativeCardData	Problem accessing administrative card data.	X
1122	ReferralUnableToValidatePIN	Unable to validate PIN; security module is down.	X
1130	ReferralAuthorizationRequestCryptogram	Authorization request cryptogram (ARQC) referral.	X
1131	ReferralCardVerificationResults	Card verification results (CVR) referral.	X
1132	ReferralTerminalVerificationResults	Terminal verification results (TVR) referral.	X
1133	ReferralReasonOnlineCode	Reason online code referral.	X
1134	ReferralFallback	Fallback referral.	X
1150	ServiceMerchantNotOnFile	Merchant not on file.	X
1150	ServiceMerchantTerminalDisabled	Blocked terminal.	X
1150	ServiceMerchantAcquirerDisabled	Blocked terminal owner.	X
1200	TransactionInvalidAccount	Invalid account.	X
1201	TransactionIncorrectPIN	Incorrect PIN.	X
1202	TransactionCashAdvanceLessThanMinimum	Cash advance is less than minimum.	X
1203	TransactionAdministrativeCardNeeded	Administrative card needed.	X
1204	TransactionEnterLesserAmount	Enter a lesser amount (This code can also be used when the transaction amount exceeds the retailer ceiling limits.).	X
1205	TransactionInvalidAdvanceAmount	Invalid advance amount.	X
1206	TransactionCardholderAuthorization	Cardholder authorization data not	X

	DataNotFound	found.	
1207	TransactionInvalidTransactionDate	Invalid transaction date.	X
1208	TransactionInvalidExpirationDate	Invalid expiration date.	X
1209	TransactionInvalidTransactionCode	Invalid transaction code.	X
1251	TransactionCashBackExceedsDailyLimit	Cash back exceeds daily limit.	X
1400	TransactionAuthorizationRequestCryptogramFailure	Authorization request cryptogram (ARQC) failure.	X
1401	TransactionHardwareSecurityModuleParameterError	Hardware security module parameter error.	X
1402	TransactionHardwareSecurityModuleFailure	Hardware security module failure.	X
1403	TransactionIntegratedCircuitCardKeyInformationNotFound	Integrated circuit card key information not found.	X
1404	TransactionApplicationTransactionCounterCheckFailure	Application transaction counter (ATC) check failure.	X
1405	TransactionCardVerificationResultsDecline	Card verification results (CVR) decline.	X
1406	TransactionTerminalVerificationResultsDecline	Terminal verification results (TVR) decline.	X
1407	TransactionReasonOnlineCodeDecline	Reason online code decline.	X
1408	TransactionFallbackDecline	Fallback decline.	X
1500	ProductDenied	Unauthorized product.	X
1557	SuspectedFraudCallWag	WAG antifraud. Suspected fraud, call WAG	X
1558	LockedCardSendSMS	WAG antifraud. Card locked, for unlock card send SMS to WAG	X
1800	TransactionFormatError	Format error.	X
1801	TransactionInvalidData	Invalid data.	X
1802	TransactionInvalidEmployeeNumber	Invalid employee number.	X
1809	TransactionInvalidCloseTransaction	Invalid close transaction.	X
1810	TransactionTimeout	Transaction timeout.	X
1811	TransactionSystemError	System error.	X
1811	SuperiorAuthorizationSystemError	Authorization failed on the master authorization system.	X
1820	TransactionInvalidTerminalIdentifier	Invalid terminal identifier.	X
1821	TransactionInvalidResponseLength	Invalid response length.	X

1882	DownloadAborted	Download aborted (call for service).	X
1878	DeclineIncorrectPINLengthError	Incorrect PIN length error.	X
1889	DeclineMACCommunicationsKeySynchronizationError	MAC communications key (KMAC) synchronization error.	X
1898	DeclineInvalidMAC	Invalid MAC.	X
1899	DeclineSequenceErrorResync	Sequence error—resync.	X
1900	POSCaptureNumberOfPINAttemptsExceeded	Number of PIN tries exceeded.	X
1901	POSCaptureExpiredCard	Expired card.	X
1902	POSCaptureNegativeCardFileCaptureCode	Negative card file capture code.	X
1903	POSCaptureCardStatusIsStolen	Card status is 3 (stolen).	X
1904	POSCaptureAdvanceLessThanMinimum	Advance less than minimum.	X
1905	POSCaptureNumberTimesUsedExceeded	Number times used exceeded.	X
1906	POSCaptureDelinquent	Delinquent.	X
1907	POSCaptureOverLimitTable	Over limit table.	X
1908	POSCaptureAmountOverMaximum	Amount over maximum.	X
1950	DeclinedAdministrativeCardNotFound	Administrative card not found.	X
1951	DeclinedAdministrativeCardNotAllowed	Administrative card not allowed.	X
1959	DeclinedAdministrativeTransactionsNotSupported	Administrative transactions not supported.	X
1956	ChargebackCustomerFileUpdatedAcquirerNotFound	Chargeback—customer file updated—acquirer not found.	X
1957	ChargebackIncorrectPrefixNumber	Chargeback—incorrect prefix number.	X
1958	ChargebackIncorrectResponseCodeOrCardPrefixConfiguration	Chargeback—incorrect response code or card prefix configuration.	X
1960	ChargebackApprovedCustomerFileNotUpdated	Chargeback—approved customer file not updated.	X
1961	ChargebackApprovedCustomerFileNotUpdatedAcquirerNotFound	Chargeback—approved customer file not updated, acquirer not found.	X
1962	ChargebackAcceptedIncorrectDestination	Chargeback—accepted, incorrect destination.	X
1963	NoCardTimeout	No card timeout	X

1964	InvalidSignature	Invalid signature	X
2000	PAX_DEFINE	ReturnCodes by PAX	-
2001	ICC_RESET_ERR	IC cardreset is failed	X
2002	ICC_CMD_ERR	IC card command is failed	X
2003	ICC_BLOCK	IC card is blocked	X
2004	EMV_RSP_ERR	Status Code returned by IC card is not 9000	X
2005	EMV_APP_BLOCK	The application selected is blocked	X
2006	EMV_NO_APP	There is no AID matched between ICC and terminal	X
2007	EMV_USER_CANCEL	The current operation or transaction was canceled by user	X
2008	EMV_TIME_OUT	User's operation is timeout	X
2009	EMV_DATA_ERR	Data error is found	X
2010	EMV_NOT_ACCEPT	Transaction is not accepted	X
2011	EMV_DENIAL	Transaction is denial	X
2012	EMV_KEY_EXP	Certification Authority Public Key is Expired	X
2013	EMV_NO_PINPAD	PIN enter is required, but PIN pad is not present or not working	X
2014	EMV_NO_PASSWORD	PIN enter is required, PIN pad is present, but there is no PIN entered	X
2015	EMV_SUM_ERR	Checksum of CAPK is error	X
2016	EMV_NOT_FOUND	Appointed Data element can't be found	X
2017	EMV_NO_DATA	The length of the appointed Data Element is 0	X
2018	EMV_OVERFLOW	Memory is overflow	X
2019	NO_TRANS_LOG	There is no Transaction log	X
2020	RECORD_NOTEXIST	Appointed log is not existed	X
2021	LOGITEM_NOTEXIST	Appointed Label is not existed in current log record	X
2022	ICC_RSP_6985	Status Code returned by IC card for GPO is 6985	X
2023	CLSS_USE_CONTACT	Must use other interface for the transaction	X
2024	EMV_FILE_ERR	There is file error found	X

2025	CLSS_TERMINATE	Must terminate the transaction	X
2026	CLSS_FAILED	Contactless transaction is failed	X
2027	CLSS_DECLINE	Transaction should be declined	X
2028	CLSS_TRY_ANOTHER_CARD	Try another card (DPAS Only)	X
2030	CLSS_PARAM_ERR	Parameter is error = EMV_PARAM_ERR	X
2031	CLSS_WAVE2_OVERSEA	International transaction (for VISA AP payWaveLevel2 IC card use)	X
2033	CLSS_WAVE2_US_CARD	US card (for VISA AP payWaveL2 IC card use)	X
2034	CLSS_WAVE3_INS_CARD	Need to use IC card for the transaction (for VISA payWaveIC card use)	X
2035	CLSS_RESELECT_APP	Select the next AID in candidate list	X
2036	CLSS_CARD_EXPIRED	IC card is expired	X
2037	EMV_NO_APP_PPSE_ERR	Select PPSE command returns error code, or there is no matching Application	X
2038	CLSS_USE_VSDC	Switch to Contactless PBOC	X
2039	CLSS_CVMDECLINE	DVM result is decline	X
2040	CLSS_REFERER_CONSUMER_DEVICE	Status Code returned by IC card is 6986, please see phone	X
2041	CLSS_LAST_CMD_ERR	Terminal did not receive the response of the last command of Read Record. (qPBOC only)	X
2042	CLSS_API_ORDER_ERR	APIs are called in wrong order. Please call Clss_GetDebugInfo_xxx to get error codes.	X
2043	CLSS_TORN_CARDNUM_ERR	Torn log's PAN is different with the reselect card's pan	X
2044	CLSS_TRON_AID_ERR	Torn log's AID is different with the reselect card's AID	X
2045	CLSS_TRON_AMT_ERR	Torn log's amount is different with the current transaction's amount	X
2046	CLSS_CARD_EXPIRED_REQ_ONLINE	Card expired and the transaction should go online	X
2047	CLSS_FILE_NOT_FOUND	ICC return 6A82 (File not found) in response to the SELECT command	X
2048	CLSS_TRY_AGAIN	Try again	X
2200	CLSS_PAYMENT_NOT_ACCEPT	Payment Type Not Accepted for flash	X

2301	CLSS_ISSERTED_ICCCARD	IC card is detected during contactless transaction	X
2302	CLSS_SWIPED_MAGCARD	Magnetic stripe card is detected during contactless transaction	X
3000	MONEMV_CLS_KERNEL	Monet kernel	-
3257	MONEMV_CLS_KERNEL_STATUS_SERVICE_NOT_AVAILABLE	The kernel to be accessed is not loaded in the terminal.	X
3258	MONEMV_CLS_KERNEL_STATUS_DATABASE_ERROR	A database error occurred.	X
3259	MONEMV_CLS_KERNEL_STATUS_INVALID_INPUT_DATA	One of the provided data is incorrect.	X
3260	MONEMV_CLS_KERNEL_STATUS_NOT_SUPPORTED	The called function is not supported by the kernel.	X
3261	MONEMV_CLS_KERNEL_STATUS_LACK_OF_MEMORY	There is not enough memory to complete the transaction.	X
3262	MONEMV_CLS_KERNEL_STATUS_COMMUNICATION_ERROR	A communication error occurred with the contactless card.	X
3263	MONEMV_CLS_KERNEL_STATUS_MISSING_INPUT_DATA	A mandatory data is missing to perform the transaction.	X
3264	MONEMV_CLS_KERNEL_STATUS_ICC_MISSING_DATA	A mandatory ICC data is missing to perform the transaction.	X
3265	MONEMV_CLS_KERNEL_STATUS_ICC_INVALID_DATA	The data returned by the card is not correctly formatted.	X
3266	MONEMV_CLS_KERNEL_STATUS_ICC_REDUNDANT_DATA	Card returned redundant data.	X
3267	MONEMV_CLS_KERNEL_STATUS_ICC_DATA_FORMAT_ERROR	The card response is not correctly formatted (parsing error, empty response, etc).	X
3268	MONEMV_CLS_KERNEL_STATUS_TERMINAL_MISSING_DATA	A mandatory terminal data is missing to perform the transaction.	X
3269	MONEMV_CLS_KERNEL_STATUS_CARD_BLOCKED	A Card is blocked and the transaction cannot be performed.	X
3270	MONEMV_CLS_KERNEL_STATUS_APPLICATION_BLOCKED	The application in the card is blocked.	X
3271	MONEMV_CLS_KERNEL_STATUS_REMOVE_AID	The AID shall be removed from the candidate list.	X
3272	MONEMV_CLS_KERNEL_STATUS_UNKNOWN_SW	Unexpected response code from the ICC.	X
3273	MONEMV_CLS_KERNEL_STATUS_CONDITION_OF_USE_NOT_SATISFIED	Conditions of use not satisfied" in the GPO response.	X
3275	MONEMV_CLS_KERNEL_STATUS_OFFLINE_DECLINED	Transaction is offline declined.	X

3276	MONEMV_CLS_KERNEL_STATUS_ONLINE_AUTHORISATION	Transaction succeeded and needs an online authorisation to be completed.	-
3277	MONEMV_CLS_KERNEL_STATUS_CANCELLED	Transaction has been cancelled.	X
3278	MONEMV_CLS_KERNEL_STATUS_USE_CONTACT_INTERFACE	The transaction has to be conducted over another interface (chip or swipe for example)	X
3279	MONEMV_CLS_KERNEL_STATUS_NOT_ALLOWED	This function cannot be called as no transaction is in process with this kernel or cancellation is not allowed according to the transaction progress.	X
3280	MONEMV_CLS_KERNEL_STATUS_CONTINUE	The transaction flow must continue.	-
3281	MONEMV_CLS_KERNEL_STATUS_SUSPEND	The transaction flow must be stopped.	X
3282	MONEMV_CLS_KERNEL_STATUS_INTERNAL_ERROR	A kernel internal error occurred.	X
3283	MONEMV_CLS_KERNEL_STATUS_LIBRARY_INTERFACE_ERROR	An error occurred into the kernel interface (linked to the custom application).	X
3284	MONEMV_CLS_KERNEL_STATUS_EXPIRED_CERTIFICATE	The certificate used for Offline data authentication is expired.	X
3285	MONEMV_CLS_KERNEL_STATUS_REVOKED_CERTIFICATE	The certificate used for Offline data authentication is revoked.	X
3286	MONEMV_CLS_KERNEL_STATUS_CARD_UNKNOWN	The contactless card accessed isn't the same as at the beginning of the transaction. This error occurs for a new card presentation as Issuer Script Processing ...")	X
3287	MONEMV_CLS_KERNEL_STATUS_MOBILE	A mobile phone GPO response has been detected. This error allows to restart a selection application cycle with new user message (for mobile phone) ...")	X
3383	MONEMV_CLS_KERNEL_STATUS_UNKNOWN	Unknown	X
4000	FEITIAN_READER	Feitian reader	-
8005	DOMESTIC_CARD_ONLY_ERROR	This error code is used for the Cashback operation and indicates that for this operation, only domestic cards can be used. This means that the terminal country code has to be the same as the card country code. If the card country code differs from the terminal country code, this error occurs.	X

8008	READING_CARD_FAILED	Error when card was not processed correctly	X
8009	SECOND_TAP_CARD_MISMATCH	Error occurred when a different card was used for the required second tap of the transaction.	X
8010	EXTERNAL_PINPAD_CONNECTION_ERROR	Error when external pin-pad has been disconnected	X
8011	PRINTER_OVER_HEAT	Error when printer is overheating	X
8012	PRINTER_UNFINISHED	Error when printer did not finish it's job	X
8013	PRINTER_FAILURE	General printer failure	X
8014	PRINTER_UNKNOWN_ERROR	Unknown printer failure	X
8015	PRINTER_VOLTAGE_TOO_LOW	Error when battery voltage is too low	X
8016	ChangePinIncorrectPUK	Error when incorrect PUK entered during PIN change attempt	X
8017	ChangePinCountLimitExceeded	Error when maximum change attempt limit has been exceeded	X
8018	ChangePinFailedPinNotSet	Error when PIN cannot be changed	X
8019	OFFLINE_TRANSACTIONS_VOLUME_EXCEEDED	Error when maximum transactions volume has been exceeded	X
8020	DAILY_OFFLINE_TRANSACTIONS_LIMIT_EXCEEDED	Error when daily offline transactions limit has been exceeded	X
8021	TOTAL_OFFLINE_TRANSACTIONS_LIMIT_EXCEEDED	Error when total offline transactions limit has been exceeded	X
8022	OFFLINE_TRANSACTION_AMOUNT_LIMIT_EXCEEDED	Error when maximum transaction's amount has been exceeded	X
8023	TRANSACTION_NOT_ALLOWED_IN_OFFLINE_MODE	Error when unsupported operation is started in Full Offline (deferred) mode	X
2147483647	UNDEFINED	Undefined	-

PinCommunicationsKey

```
public class PinCommunicationsKey {
    private PinCommunicationsKey.KeyLength keyLength;
    private byte[] key;
}

public static enum KeyLength {
    SINGLE(16),
    DOUBLE(32),
    TRIPLE(48);
}
```

EmvResponseData

PARAMETER	TYPE	DESCRIPTION
smartCardScheme	int	Scheme of the smart card
authorisationResponseCode	string	The response code of authorization.
issuerAuthenticationData	string	Information whether is transaction confirmed or not

EmvAdditionalResponseData

```
public class EmvAdditionalResponseData {
    private Integer smartCardScheme;
    private String issuerScriptData;
}
```

CvmType

CvmTypeList
NO
SIGNATURE
PIN_ONLINE
PIN_OFFLINE
CONSUMER_DEVICE

CardInputType

CardInputType
MAGNETIC
MAGNETIC_FALLBACK
CONTACT
CLESS
CLESS_MAGSTRIPE
MANUAL

TransactionType parameter

TransactionType
SALE_ONLINE
SALE_OFFLINE
SALE_DEFERRED
QR_SALE
TOKEN
READ_CARD
READ_CARD_PAYMENT
CASHBACK_ONLINE
PREAUTHORIZATION
PREAUTHORIZATION_INCREMENT
PREAUTHORIZATION_DECREMENT
PREAUTHORIZATION_COMPLETION
EXTERNAL_PREAUTHORIZATION_INCREMENT
EXTERNAL_PREAUTHORIZATION_DECREMENT
EXTERNAL_PREAUTHORIZATION_COMPLETION
MOTO_SALE
MOTO_PREAUTHORIZATION
RETURN_ONLINE
RETURN_OFFLINE
REFFERAL_RETURN

CLOSE_BATCH

AUTO_CLOSE_BATCH

SUBTOTAL_BATCH

HANDSHAKE

TRANSACTION_STATUS

CARD_VERIFY

PURCHASE_ADJUSTMENT

UNDEFINED

Transaction state

Transaction state
WaitForCard
WaitForPin
WaitForUserInput
Connecting
Connected
Disconnected
Sending
Receiving
Finished
FinishedPlain
Idle

BatchTotals parameter

PARAMETER	TYPE	DESCRIPTION
batchTotals	obj	Object of the batch totals
adjsAmount	int	Amount of adjustments
adjsCount	int	Count of adjustments
batchNumber	int	Number of batch
creditsAmount	int	Amount of refund
creditsCount	int	Count of refund TRX
debitsAmount	int	Amount of payment TRX
debitsCount	int	Count of payment TRX
shiftNumber	int	number of shift